

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 241 206 A1**

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
18.09.2002 Bulletin 2002/38

(21) Application number: **00970016.2**

(22) Date of filing: **24.10.2000**

(51) Int Cl.7: **C08J 5/18, C08F 10/06,
C08F 4/645, B32B 27/32,
B29C 41/24
// (C08L23/10, B29K23:00)**

(86) International application number:
PCT/JP00/07408

(87) International publication number:
WO 01/030890 (03.05.2001 Gazette 2001/18)

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **26.10.1999 JP 30352299
18.11.1999 JP 32790699**

(71) Applicant: **IDEMITSU PETROCHEMICAL CO.,
LTD.
Tokyo 130-0015 (JP)**

(72) Inventors:
• **MINAMI, Yutaka
Ichihara-shi, Chiba 299-0107 (JP)**

• **KANAMARU, Masami
Ichihara-shi, Chiba 299-0107 (JP)**
• **FUNABASHI, Hideo
Ichihara-shi, Chiba 299-0107 (JP)**

(74) Representative:
**Gille Hrabal Struck Neidlein Prop Roos
Patentanwälte,
Brucknerstrasse 20
40593 Düsseldorf (DE)**

(54) **POLYPROPYLENE FILM AND MULTILAYERED LAMINATE**

(57) The polypropylene film of the present invention satisfies the relationship: $TM \geq 12.5 \times HST - 900$, where in TM is a tensile modulus (MPa) and HST is a heat seal temperature (°C), and is well-balanced between the tensile modulus and the heat seal temperature, less tacky, and excellent in processability, transparency and impact resistance. The polypropylene film may be produced from a propylene polymer (A) having: (1) a melting point (Tm) of from 120 to 135°C as measured by differential scanning calorimeter (DSC); (2) a melting endotherm ΔH (J/g) as measured by the DSC, satisfying the follow-

ing formula: $\Delta H \geq 0.45 \times Tm + 22$; (3) a peak top half-width (Th) of 5 °C or lower when measured on an elution curve by temperature rising fractionation; and (4) an intrinsic viscosity $[\eta]$ of from 1 to 3 dl/g as measured at 135°C in tetralin. A multilayered polyolefin resin laminate of the present invention comprises at least one outermost layer made of the above polypropylene film, and is well-balanced between a tensile modulus and a heat seal temperature, less tacky and excellent in slipping and anti-blocking properties.

EP 1 241 206 A1

EP 1 241 206 A1

Description

Technical Field

5 [0001] The present invention relates to a novel polypropylene film usable as a substitute for soft vinyl chloride films. More particularly, the present invention relates to a novel polypropylene-based film that is less tacky, well-balanced between a tensile modulus and a heat seal temperature, and excellent in processability, transparency and impact resistance. The present invention further relates to a novel multilayered polyolefin resin laminate, and more particularly, to a novel multilayered polyolefin resin laminate that is well-balanced between a tensile modulus and a heat seal temperature, less tacky, and excellent in slipping and anti-blocking properties necessary for high-speed bag forming.

Background Art

15 [0002] Vinyl chloride resins are widely used as soft resin. However, it is known that the vinyl chloride resins generate harmful substances upon burning. For this reason, it has been strongly required to develop a substitute resin. Recently, there have been used, as a substitute resin, olefin polymers produced by using a metallocene catalyst. Example of these olefin polymers include a copolymer of ethylene and α -olefin. However, such a copolymer poses a problem that it becomes too tacky when softened. Further, shaped articles, such as film, produced from the copolymer have poor surface properties because of deteriorated transparency, rigidity and low-temperature heat sealability, thereby rendering it unsatisfactory. The copolymer is also poor in processability.

20 [0003] Crystalline propylene polymer films are widely used as a packaging film owing to their excellent rigidity, transparency and moisture resistance. The crystalline propylene polymer films may be used alone as monolayered films, or in combination with films of ethylene-vinyl acetate copolymer, linear polyethylene or the like as multilayered laminate films. For their use, the packaging films are often processed into bags, regardless of whether the films are monolayered or multilayered. A series of processes for forming a film into a bag and closing the opening of the bag after putting contents therein is generally carried out by pressing the film edges with a heated rod and melt-welding the edges to each other (so called "heat sealing"). Recently, it has been required to speed up the bag-forming and packaging processes for increased productivity, which results in great demands for materials with good heat sealability. Also, it has been required for the film to inevitably have slipping and anti-blocking properties so that the above fabrication process can be efficiently made. It has been known that a multilayered laminate fails to show a sufficient interlaminar strength when produced without using an adhesive and the like. It is therefore necessary to adhere layers of a laminate by using the adhesive in order to impart excellent properties of low-temperature heat sealability, rigidity, transparency, moisture resistance and the like to the multilayered laminates.

35 Disclosure of the Invention

[0004] Thus, a first object of the present invention is to provide a polypropylene film that is less tacky, well-balanced between a tensile modulus and a heat seal temperature, and excellent in processability, transparency and impact resistance. A second object of the present invention is to provide a multilayered polyolefin resin laminate that is well-balanced between a tensile modulus and a heat seal temperature, less tacky, and excellent in slipping and anti-blocking properties necessary for high-speed bag forming.

40 [0005] As a result of extensive research, the inventors have found that the above objects are achieved by a polypropylene film satisfying a specific relationship between a tensile modulus TM (MPa) and a heat seal temperature HST ($^{\circ}$ C). The inventors have further found that the above object is achieved by a multilayered polyolefin resin laminate in which at least one outermost layer is made of the above polypropylene film. The present invention has been accomplished based on these findings.

45 [0006] Thus, according to a first aspect of the present invention, there is provided a polypropylene film satisfying the following formula:

$$50 \quad TM \geq 12.5 \times HST - 900$$

wherein TM is a tensile modulus (MPa) and HST is a heat seal temperature ($^{\circ}$ C).

[0007] The above polypropylene film may be produced from a propylene polymer (A) having:

- 55
- (1) a melting point Tm of from 120 to 135 $^{\circ}$ C as measured by differential scanning calorimeter (DSC);
 - (2) a melting endotherm ΔH (J/g) as measured by the DSC, satisfying the following formula:

EP 1 241 206 A1

$$\Delta H \geq 0.45 \times T_m + 22;$$

- (3) a half-width T_h (°C) of the peak top of an elution curve as measured by temperature rising fractionation, of 5°C or lower; and
 (4) an intrinsic viscosity $[\eta]$ of from 1 to 3 dl/g as measured at 135 °C in tetralin.

[0008] As the propylene polymer, preferred is a propylene homopolymer (A-1) satisfying:

- (1) a meso pentad fraction [mmmm] of from 70 to 80 mol%; and
 (2) a racemic pentad fraction [rrrr] satisfying, together with 1-[mmmm], the following formula:

$$[rrrr]/(1 - [mmmm]) \leq 0.1.$$

[0009] The propylene polymer (A) and the propylene homopolymer (A-1) are produced by polymerizing propylene, or polymerizing propylene with ethylene and/or C_4 - C_{20} α -olefin, in the presence of a specific transition metal catalyst.

[0010] According to a second aspect of the present invention, there is provided a multilayered polyolefin resin laminate, wherein at least one outermost layer is made of the above polypropylene film. Other laminate layers are preferably produced from a crystalline propylene polymer other than the propylene polymer (A) and the propylene homopolymer (A-1).

Best Mode for Carrying Out the Invention

[0011] The present invention will be described below in detail.

(I) Polypropylene Film

[0012] The polypropylene film of the present invention satisfies the following formula:

$$TM \geq 12.5 \times HST - 900,$$

preferably

$$TM \geq 12.5 \times HST - 800 \text{ and } HST \leq 130,$$

more preferably

$$TM \geq 12.5 \times HST - 750 \text{ and } HST \leq 130$$

wherein TM is a tensile modulus (MPa) and HST is a heat seal temperature (°C). The TM and HST measuring methods are described in detail in Examples below.

[0013] The polypropylene film is, as described above, well-balanced between the tensile modulus and the heat seal temperature, i.e., exhibits a high rigidity and an excellent low-temperature heat sealability, so that the film is suitably used as food packaging films, agricultural films (for use in, e.g., a vinyl plastic green house) and sealant films. The polypropylene film incapable of satisfying the above formula fails to be balanced in the tensile modulus and the heat sealability, thereby rendering it unsatisfactory.

[0014] Specifically, as the polypropylene film of the present invention, there may be exemplified a film produced from a propylene polymer (A) described below. (I-1) Propylene polymer (A)

[0015] The propylene polymer (A) has the following characteristics (1) to (4):

- (1) a melting point T_m of from 120 to 135 °C as measured by differential scanning calorimeter (DSC);
 (2) a melting endotherm ΔH (J/g) as measured by the DSC, satisfying the following formula:

EP 1 241 206 A1

$$\Delta H \geq 0.45 \times T_m + 22;$$

- (3) a half-width T_h of the peak top of an elution curve as measured by temperature rising fractionation, of 5°C or lower; and
 (4) an intrinsic viscosity $[\eta]$ of from 1 to 3 dl/g as measured at 135 °C in tetralin.

[0016] The use of the propylene polymer (A) satisfying the above requirements enables the production of a polypropylene film that is less tacky, well-balanced between the tensile modulus and the heat seal temperature, and excellent in processability, transparency and impact resistance.

[0017] T_m and ΔH are determined by DSC measurement. Namely, by using a differential scanning calorimeter ("DSC-7" available from Perkin-Elmer Corp.), 10 mg of a sample was melted by heating at 230°C for 3 min in nitrogen atmosphere, and then cooled to 0°C at a rate of 10°C/min. The cooled sample was allowed to stand at 0°C for 3 min, and then heated at a temperature rise rate of 10°C/min to obtain a melting endotherm. The peak top of the maximum peak in the melting endotherm curve is the melting point T_m , and the melting endotherm during the melting is ΔH (J/g). Method for measuring T_h and $[\eta]$ are described in detail in Examples below.

[0018] The above requirements (1) to (4) will be described in detail.

(1) When the melting point T_m is lower than 120°C, polymer products tend to be disadvantageously fused to adhere during boiling disinfection in the food packaging and medical applications. Further, when the melting point T_m exceeds 135°C, the polymer tends to be unsatisfactory as a substitute for a soft vinyl chloride resin.

(2) When satisfying the requirement (2), a propylene polymer is well-balanced between the melting point and the melting endotherm and also between low-temperature heat sealability and mechanical strength (e.g., elastic modulus, impact resistance, rigidity). A propylene polymer incapable of satisfying the requirement may fail to show a good balance between processability and/or processability at low temperature and mechanical strength, so that films obtained from the polymer become ill-balanced between low-temperature heat sealability and mechanical strength, thereby rendering it unsatisfactory. The propylene polymer (A) preferably satisfies the following formula:

$$\Delta H \geq 0.45 \times T_m + 25.$$

(3) A polymer satisfying the requirement (3) provides a film having an excellent heat sealability. The half-width (T_h) of a main elution peak is preferably 4.0 °C or lower as measured by temperature rising fractionation. When T_h exceeds 5°C, the polymer tends to become sticky with unfavorable result of rendering the heat sealability of a resultant film insufficient.

(4) The intrinsic viscosity $[\eta]$ is from 1 to 3 dl/g, preferably from 1 to 2.5 dl/g, more preferably from 1.5 to 2.0 dl/g, as measured at 135°C in tetralin. When the intrinsic viscosity $[\eta]$ is less than 1 dl/g, the polymer tends to become sticky and makes a resultant film low in mechanical strength. When exceeding 3 dl/g, the processability becomes poor owing to reduced melt flowability.

[0019] Further, the propylene polymer (A) preferably has a molecular weight distribution (M_w/M_n) of 2.5 to 4.0, more preferably 2.5 to 3.5, most preferably 2.5 to 3.0 as measured by gel permeation chromatography (GPC). When the molecular weight distribution (M_w/M_n) is less than 2.5, the polymer is deteriorated in processability. When exceeding 4.0, the polymer tends to become sticky. The apparatus and measuring conditions for GPC will be described in Examples below.

[0020] In addition, the propylene polymer (A) preferably contains a fraction extractable with boiling diethyl ether, as an index of tackiness, in an amount of 0 to 10% by weight, more preferably 0 to 5% by weight so as to prevent tacky components from bleeding out to the surface of a shaped article.

[0021] The tensile modulus of the propylene polymer (A) is preferably from 600 to 1,600 MPa, more preferably from 700 to 1,200 MPa, most preferably 800 to 1,100 MPa.

[0022] Being produced from the propylene polymer (A) having a narrow molecular weight distribution (M_w/M_n) and containing a less amount of a fraction extractable with boiling diethyl ether, the polypropylene film is less tacky because of prevention of tacky components from bleeding out to its surface. Further, the polypropylene film is excellent not only in surface properties such as slipping and anti-blocking properties but also in processability because of less tackiness.

[0023] The polypropylene film produced from the propylene polymer (A) has an internal haze of usually 5% or less, preferably 3% or less, as determined from its haze value measured according to JIS K-7105, and therefore exhibits excellent transparency. The polypropylene film made of the propylene polymer (A) has an internal haze of 5% or less, preferably 3% or less as determined from its haze value measured according to JIS K-7105, and therefore, exhibits

EP 1 241 206 A1

excellent transparency. Also, the polypropylene film has an impact resistance of 10,000 J/m² or higher, preferably 15,000 J/m² or higher as measured by a film impact tester available from Toyo Seiki Seisaku-Sho, Co., Ltd. using a 1/2 inch impact head, and therefore, exhibits an excellent impact resistance.

[0024] The propylene polymer (A) may include propylene homopolymers and propylene copolymers of propylene and a small amount of ethylene and/or C₄-C₂₀ α-olefin, with propylene homopolymers being preferred. Examples of C₄-C₂₀ α-olefin include 1-butene, 1-pentene, 4-methyl-1-pentene, 1-hexene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene, and 1-eicocene. These olefins may be used alone or in combination of two or more. (1-2) Propylene Homopolymer (A-1)

[0025] As the propylene homopolymer, preferred is a propylene homopolymer (A-1) satisfying (1) and (2):

- (1) a meso pentad fraction [mmmm] of from 70 to 80 mol%; and
- (2) a racemic pentad fraction [rrrr] satisfying, together with 1-[mmmm], the following formula:

$$[\text{rrrr}]/(1 - [\text{mmmm}]) \leq 0.1.$$

[0026] The meso pentad fraction [mmmm] described herein means a meso fraction in pentad units in polypropylene molecular chain as measured using methyl signals in ¹³C-NMR spectra according to the method proposed by A. Zambelli et al., "Macromolecules", 6, 925 (1973). The larger value of the meso pentad fraction means a higher stereoregularity. The meso pentad fraction [mmmm] of the propylene homopolymer (A-1) used in the present invention is preferably 70 to 80 mol%. When less than 70 mol%, the polymer tends to be deteriorated in the tensile modulus and the impact resistance and has a poor processability. When the meso pentad fraction [mmmm] exceeds 80 mol%, the softness is lost and the low-temperature heat sealability is impaired because of increased high heat seal temperature. The racemic pentad fraction [rrrr] means a racemic fraction in pentad units in polypropylene molecular chain. The value of [rrrr]/(1 - [mmmm]) is determined from the above fractions in pentad units, and is an index indicating uniformity of the regularity distribution of the propylene homopolymer (A-1). When the value becomes larger, the regularity distribution is broadened to give a polymer comprising a mixture of a high-stereoregular polypropylene and an atactic polypropylene as in the case of a conventional polypropylene produced in the presence of a known catalyst system, thereby causing a film to have an increased tackiness and a reduced transparency. The value of [rrrr]/(1 - [mmmm]) of the propylene homopolymer (A-1) used in the present invention is preferably 0.08 or less, more preferably 0.06 or less, most preferably 0.02 or less. When the value of [rrrr]/(1 - [mmmm]) exceeds 0.1, the polymer tends to become sticky. The measuring method by ¹³C-NMR spectra is described in detail in Examples below.

[0027] In general, the polymerization of propylene usually proceeds by so-called 1,2-insertion in which the carbon atom located on the methylene side of a propylene monomer is bonded to the active site of a catalyst and propylene monomers are sequentially coordinated in the same manner to cause polymerization. However, 2,1-insertion or 1,3-insertion (abnormal insertion) rarely occurs. In the propylene homopolymer (A-1) used in the present invention, it is preferred that the 2,1-insertion or 1,3-insertion is minimized. Further, the ratio of these insertions is preferred to satisfy the relationship represented by the following formula (1):

$$[(m-2,1) + (r-2,1) + (1,3)] \leq 5.0 (\%) \quad (1)$$

wherein (m-2,1) is a content (%) of meso 2,1-insertion as measured by ¹³C-NMR; (r-2,1) is a content (%) of racemic 2,1-insertion as measured by ¹³C-NMR; and (1,3) is a content (%) of 1,3-insertion as measured by ¹³C-NMR, more preferably by the following formula (2):

$$[(m-2,1) + (r-2,1) + (1,3)] \leq 1.0 (\%) \quad (2),$$

and
most preferably by the following formula (3):

$$[(m-2,1) + (r-2,1) + (1,3)] \leq 0.1 (\%) \quad (3).$$

A polymer not satisfying the formula (1) may, in some cases, be deteriorated in crystallinity more than expected to cause tackiness.

[0028] The insertion contents (m-2,1), (r-2,1) and (1,3) are calculated from integral intensities of respective peaks

EP 1 241 206 A1

of ^{13}C -NMR spectra which are assigned to the respective insertions according to the method reported in Grassi, et al., "Macromolecules", 21, p. 617 (1988) and Busico, et al., "Macromolecules", 27, p. 7538 (1994). Namely, (m-2,1) is a meso 2,1-insertion content (%) calculated from a ratio of the integral intensity of the $\text{P}\alpha,\gamma$ threo peak at around 17.2 ppm to the integral intensity of a whole methyl carbon region. The content (r-2,1) is a racemic 2,1-insertion content (%) calculated from a ratio of the integral intensity of the $\text{P}\alpha,\gamma$ threo peak at around 15.0 ppm to the integral intensity of a whole methyl carbon region. The content (1,3) is a 1,3-insertion content (%) calculated from a ratio of the integral intensity of the $\text{T}\beta,\gamma$ peak at around 31.0 ppm to the integral intensity of a whole methyl carbon region.

[0029] Further, it is more preferred that the propylene homopolymer (A-1) used in the present invention shows substantially no peak attributable to a molecular chain end derived from the 2,1-insertion (11-butyl) when measured by ^{13}C -NMR. With respect to the molecular chain end that is derived from the 2,1-insertion, the respective insertion contents are calculated from the integral intensities of peaks of ^{13}C -NMR spectra which are assigned to the respective insertions according to the method reported in Jungling, et al., "J. Polym. Sci.: Part A: Polym. Chem.", 33, p. 1305 (1995). In case of isotactic polypropylene, the peak appearing near 18.9 ppm is assigned to the end methyl carbon of butyl. ^{13}C -NMR measurement for determining the abnormal insertion and the molecular chain end is conducted in the same manner as in the measurement of the meso pentad fraction [mmmm] described above.


(1-3) Production of Propylene Polymer (A) and Propylene Homopolymer (A-1)

[0030] The propylene polymer (A) and the propylene homopolymer (A-1) are preferably produced using a polymerization catalyst 1 or 2 described below.

(1-3a) Polymerization Catalyst 1

[0031] The polymerization catalyst 1 comprises:

(A) a transition metal compound represented by the following general formula (I):

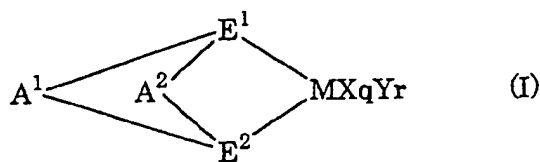

wherein M is a metal element of Groups 3 to 10 or lanthanum series of the Period Table;

E^1 and E^2 are the same or different and each independently is a ligand selected from the group consisting of substituted cyclopentadienyl, indenyl, substituted indenyl, heterocyclopentadienyl, substituted heterocyclopentadienyl, amido, phosphide, hydrocarbyl and silicon-containing group; and E^1 and E^2 are cross-linked via A^1 and A^2 ;

X is a σ -bonding ligand; and a plurality of X, if any, may be same or different and each X may be cross-linked with another X, E^1 , E^2 or Y;

Y is a Lewis base; and a plurality of Y, if any, may be same or different and each Y may be cross-linked with another Y, E^1 , E^2 or X;

A^1 and A^2 may be the same or different divalent group for cross-linking two ligands E^1 and E^2 and each independently is C_1 - C_{20} hydrocarbyl, C_1 - C_{20} halogen-containing hydrocarbyl, silicon-containing group, germanium-containing group, tin-containing group, -O-, -CO-, -S-, -SO₂-, -Se-, -NR-, -PR-, -P(O)R-, -BR- or -AlR- wherein R is hydrogen, halogen, C_1 - C_{20} hydrocarbyl or C_1 - C_{20} halogen-containing hydrocarbyl;

q is an integer of 1 to 5 given by the formula, [(valence of M) - 2]; and

r is an integer of 0 to 3, and

(B) at least one component selected from the group consisting of a compound (B-1) capable of forming an ionic complex by reacting with said transition metal compound (A) or a derivative thereof, and an aluminosilane (B-2).

[0032] In the above general formula (I), M represents a metal element belonging to Groups 3 to 10 or lanthanum series of the Period Table. Specific examples of the metal elements include titanium, zirconium, hafnium, yttrium, vanadium, chromium, manganese, nickel, cobalt, palladium and lanthanoid metals. Of these metal elements, preferred

EP 1 241 206 A1

are titanium, zirconium and hafnium in view of the activity to olefin polymerization.

[0033] E¹ and E² form a cross-linked structure via A¹ and A² and each independently is a ligand selected from the group consisting of substituted cyclopentadienyl, indenyl, substituted indenyl, heterocyclopentadienyl, substituted heterocyclopentadienyl, amido (-N<), phosphide (-P<), π -bonding hydrocarbyl (>CR¹²-, >C<) and silicon-containing group (>SiR¹²-, >Si<) wherein R¹² is hydrogen, C₁-C₂₀ hydrocarbyl or hetero atom-containing group. Examples of π -bonding hydrocarbyl (>CR¹²-, >C<) include pentadienyl and boratabenzenyl. Examples of silicon-containing group (>SiR¹²-, >Si<) include -CH₂-Si(CH₃)< and -Si(CH₃)<. The ligands E¹ and E² may be same or different from each other. Of these ligands, preferred are substituted cyclopentadienyl, indenyl and substituted indenyl.


[0034] X represents a σ -bonding ligand. A plurality of X, if any, may be same or different, and may be cross-linked with another X, E¹, E² or Y. Examples of the ligand X include halogen, C₁-C₂₀ hydrocarbyl, C₁-C₂₀ alkoxy, C₆-C₂₀ aryloxy, a C₁-C₂₀ amide, C₁-C₂₀ silicon-containing group, C₁-C₂₀ phosphide, a C₁-C₂₀ sulfide, C₁-C₂₀ sulfoxide and C₁-C₂₀ acyl. Examples of halogen include chlorine, fluorine, bromine and iodine. Examples of C₁-C₂₀ hydrocarbyl include alkyl such as methyl, ethyl, various propyl, various butyl, various hexyl, cyclohexyl and various octyl; alkenyl such as vinyl, propenyl and cyclohexenyl; arylalkyl such as benzyl, phenylethyl and phenylpropyl; and aryl such as phenyl, tolyl, dimethylphenyl, trimethylphenyl, ethylphenyl, propylphenyl, biphenyl, naphthyl, methylnaphthyl, anthracenyl and phenathryl. Of the above, preferred are alkyl such as methyl, ethyl and various propyl, and aryl such as phenyl. Examples of C₁-C₂₀ alkoxy include alkoxy such as methoxy, ethoxy, propoxy, and butoxy; phenylmethoxy and phenylethoxy. Examples of C₆-C₂₀ aryloxy include phenoxy, methylphenoxy and dimethylphenoxy. Examples of C₁-C₂₀ amido include alkylamido such as dimethylamido, diethylamido, dipropylamido, dibutylamido, dicyclohexylamido and methylethylamido; arylalkylamido such as dibenzylamido, phenylethylamido and phenylpropylamido; alkenylamido such as divinylamido, dipropenylamido and dicyclohexenylamido; arylalkylamido such as dibenzylamido, phenylethylamido and phenylpropylamido; and arylamido such as diphenylamido and dinaphthylamido. Examples of C₁-C₂₀ silicon-containing group include monohydrocarbysilyl such as methylsilyl and phenylsilyl; dihydrocarbysilyl such as dimethylsilyl and diphenylsilyl; trihydrocarbysilyl such as trimethylsilyl, triethylsilyl, tripropylsilyl, tricyclohexylsilyl, triphenylsilyl, dimethylphenylsilyl, methylphenylsilyl, triethylsilyl and trinaphthylsilyl; hydrocarbysilyl ether such as trimethylsilyl ether; silicon-substituted alkyl such as trimethylsilylmethyl; and silicon-substituted aryl such as trimethylsilylphenyl. Examples of C₁-C₂₀ phosphide include alkylphosphide such as methylphosphide, ethylphosphide, propylphosphide, butylphosphide, cyclohexylphosphide, hexylphosphide and octylphosphide; alkenylphosphide such as vinylphosphide, benzylphosphide and propenylphosphide; and aryl phosphide such as phenylphosphide. Examples of C₁-C₂₀ sulfide include alkylsulfide such as methylsulfide, ethylsulfide, propylsulfide, butylsulfide, hexylsulfide, cyclohexylsulfide and octylsulfide; alkenylsulfide such as vinylsulfide, propenylsulfide and cyclohexenylsulfide; arylalkylsulfide such as benzylsulfide, phenylethylsulfide and phenylpropylsulfide; and arylsulfide such as phenylsulfide, tolylsulfide, dimethylphenylsulfide, trimethylphenylsulfide, ethylphenylsulfide, propylphenylsulfide, biphenylsulfide, naphthylsulfide, methylnaphthylsulfide, anthracenylsulfide and phenanthrylsulfide. Examples of C₁-C₂₀ sulfoxide include alkylsulfoxide such as methylsulfoxide, ethylsulfoxide, propylsulfoxide, butylsulfoxide, hexylsulfoxide, cyclohexylsulfoxide and octylsulfoxide; alkenylsulfoxide such as vinylsulfoxide, propenylsulfoxide and cyclohexenylsulfoxide; arylalkylsulfoxide such as benzylsulfoxide, phenylethylsulfoxide and phenylpropylsulfoxide; and arylsulfoxide such as phenylsulfoxide, tolylsulfoxide, dimethylphenylsulfoxide, trimethylphenylsulfoxide, ethylphenylsulfoxide, propylphenylsulfoxide, biphenylsulfoxide, naphthylsulfoxide, methylnaphthylsulfoxide, anthracenylsulfoxide and phenanthrylsulfoxide. Examples of C₁-C₂₀ acyl include alkylacyl such as formyl, acetyl, propionyl, butyryl, valeryl, palmitoyl, stearoyl and oleyl; arylacyl such as benzoyl, toluoyl, salicyloyl, cinnamoyl, naphthoyl and phthaloyl; and oxalyl, malonyl and succinyl derived from dicarboxylic acids such as oxalic acid, malonic acid and succinic acid.

[0035] Y represents a Lewis base. A plurality of Y, if any, may be the same or different, and may be cross-linked with another Y, E¹, E² or X. The Lewis base may be amine, ether, phosphine and thioether. The amine may be C₁-C₂₀ amine exemplified by alkylamines such as methylamine, ethylamine, propylamine, butylamine, cyclohexylamine, methylethylamine, dimethylamine, diethylamine, dipropylamine, dibutylamine, dicyclohexylamine and methylethylamine; alkenylamines such as vinylamine, propenylamine, cyclohexenylamine, divinylamine, dipropenylamine and dicyclohexenylamine; arylalkylamines such as phenylmethylamine, phenylethylamine and phenylpropylamine; and arylamines such as diphenylamine and dinaphthylamine. Examples of the ethers include aliphatic simple ethers such as methyl ether, ethyl ether, propyl ether, isopropyl ether, butyl ether, isobutyl ether, n-amyl ether and isoamyl ether; aliphatic mixed ethers such as methyl ethyl ether, methyl propyl ether, methyl isopropyl ether, methyl n-amyl ether, methyl isoamyl ether, ethyl propyl ether, ethyl isopropyl ether, ethyl butyl ether, ethyl isobutyl ether, ethyl n-amyl ether and ethyl isoamyl ether; aliphatic unsaturated ethers such as vinyl ether, allyl ether, methyl vinyl ether, methyl allyl ether, ethyl vinyl ether and ethyl allyl ether; aromatic ethers such as anisole, phenetole, phenyl ether, benzyl ether, phenyl benzyl ether, α -naphthyl ether and β -naphthyl ether; and cyclic ethers such as ethylene oxide, propylene oxide, trimethylene oxide, tetrahydrofuran, and dioxane. The phosphines may be C₁-C₂₀ hydrocarbylphosphines, alkenylphosphines, (arylalkyl)phosphines, arylalkylphosphines and aromatic phosphines. Examples of hydrocarbylphosphines include monohydrocarbylphosphines such as methylphosphine, ethylphosphine, propylphosphine, butylphosphine, hex-

EP 1 241 206 A1


ylphosphine, cyclohexylphosphine and octylphosphine; dihydrocarbylphosphines such as dimethylphosphine, diethylphosphine, dipropylphosphine, dibutylphosphine, dihexylphosphine, dicyclohexylphosphine and dioctylphosphine; and trihydrocarbylphosphines such as trimethylphosphine, triethylphosphine, tripropylphosphine, tributylphosphine, trihexylphosphine, tricyclohexylphosphine and trioctylphosphine. Examples of alkenylphosphines include monoalkenylphosphines such as vinyl phosphine, propenyl phosphine and cyclohexenyl phosphine; dialkenylphosphines in which two hydrogen atoms of phosphine are replaced by alkenyl groups; and trialkenylphosphines in which three hydrogen atoms of phosphine are replaced by alkenyl groups. Examples of (arylalkyl)phosphines include benzylphosphine, (phenylethyl)phosphine and (phenylpropyl)phosphine. Examples of arylalkylphosphines include diarylalkylphosphine and aryl-dialkylphosphine in which three hydrogen atoms of phosphine are replaced by three of aryl and alkyl. Examples of aromaticphosphines include arylphosphines such as phenylphosphine, tolylphosphine, dimethylphenylphosphine, trimethylphenylphosphine, ethylphenylphosphine, propylphenylphosphine, biphenylphosphine, naphthylphosphine, methylnaphthylphosphine, anthracenyl phosphine and phenathryl phosphine; di(alkylaryl)phosphines in which two hydrogen atoms of phosphine are replaced by alkylaryl groups; and tri(alkylaryl)phosphines in which three hydrogen atoms of phosphine are replaced by alkylaryl groups. As thioethers, the sulfides mentioned above for X may be used.

[0036] A¹ and A² are divalent groups for cross-linking two ligands, and may be the same or different from each other. A¹ and A² are each independently C₁-C₂₀ hydrocarbyl, C₁-C₂₀ halogen-containing hydrocarbyl, silicon-containing group, germanium-containing group, tin-containing group, -O-, -CO-, -S-, -SO₂-, -Se-, -NR-, -PR-, -P(O)R-, -BR- or -AlR- wherein R is hydrogen, halogen, C₁-C₂₀ hydrocarbyl or C₁-C₂₀ halogen-containing hydrocarbyl. Examples of the cross-linking groups include ethylene, 1,2-cyclohexylene, dimethylsilylene, diphenylsilylene, methylphenylsilylene, dimethylgemylene, dimethylstannylene, tetramethyldisilylene, diphenyldisilylene and divalent groups represented by the following general formula:



wherein R¹³ and R¹⁴ may be same or different and each independently is hydrogen or C₁-C₂₀ hydrocarbyl; R¹³ and R¹⁴ may be bonded to each other to form a ring; and e is an integer of 1 to 4. Examples of the cross-linking groups represented by the above formula include methylene, ethylidene, propylidene, isopropylidene, cyclohexylidene and vinylidene (CH₂=C=). Of these cross-linking groups, preferred are ethylene, isopropylidene and dimethylsilylene. The suffix q is an integer of 1 to 5 given by the formula, [(valence of M) - 2], and the suffix r is an integer of 0 to 3.

[0037] In the transition metal compounds represented by the general formula (I), when E¹ and E² are substituted cyclopentadienyl, indenyl or substituted indenyl, the cross-linking groups A¹ and A² preferably form (1,2') (2,1') double bridge. Of the transition metal compounds of the general formula (I) having such a structure, preferred are those having, as a ligand, a doubly bridged biscyclopentadienyl derivative represented by the following formula (I-a):

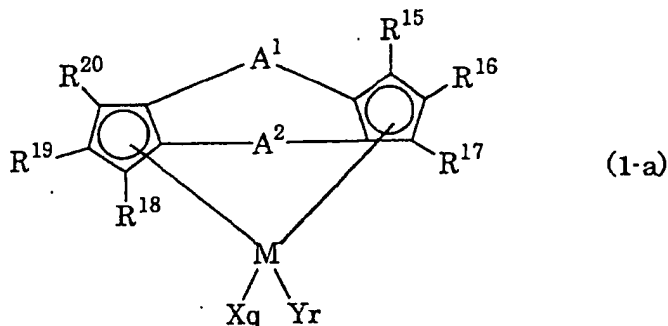

In the formula (I-a), M, A¹, A², q and r are the same as defined above. X is a σ-bonding ligand, and a plurality of X, if any, may be the same or different and may be cross-linked with another X group or Y. Examples of X are the same as exemplified above with respect to X of the general formula (I). Y is a Lewis base, and a plurality of Y, if any, may be the same or different and may be cross-linked with another Y or X. Examples of Y are the same as exemplified above with respect to Y of the general formula (I). R¹⁵ to R²⁰ are each independently hydrogen, halogen, C₁-C₂₀ hydrocarbyl,

EP 1 241 206 A1

C₁-C₂₀ halogen-containing hydrocarbyl, silicon-containing group or hetero atom-containing group, with the proviso that, at least one of R¹⁵ to R²⁰ is required to be other than hydrogen. R¹⁵ to R²⁰ may be the same or different, and adjacent pair may be bonded to each other to form a ring. In particular, R¹⁶ and R¹⁷ as well as R¹⁹ and R²⁰ are preferably bonded to each other to form a ring. More preferably, each pair forms indenyl group together with cyclopentadienyl to which each pair is attached. R¹⁵ and R¹⁸ are each preferably a group having a hetero atom such as oxygen, halogen and silicon, because the polymerization activity is enhanced.

[0038] The doubly bridged biscyclopentadienyl ligand of the transition metal compound is preferred to be (1,2') (2,1') double bridge.

[0039] Examples of the transition metal compounds represented by the general formula (I) include (1,2'-ethylene) (2,1'-ethylene)-bis(indenyl)zirconium dichloride, (1,2'-methylene)(2,1'-methylene)-bis(indenyl)zirconium dichloride, (1,2'-isopropylidene)(2,1'-isopropylidene)-bis(indenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-ethylene)-bis(3-methylindenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-ethylene)-bis(4,5-benzoidindenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-ethylene)-bis(4-isopropylindenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-ethylene)-bis(5,6-dimethylindenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-ethylene)-bis(4,7-diisopropylindenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-ethylene)-bis(2,1'-ethylene)-bis(3-methyl-4-isopropylindenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-ethylene)-bis(5,6-benzoidindenyl)zirconium dichloride, (1,2'-ethylene)(2,1'-isopropylidene)-bis(indenyl)zirconium dichloride, (1,2'-methylene)(2,1'-ethylene)-bis(indenyl)zirconium dichloride, (1,2'-methylene)(2,1'-isopropylidene)-bis(indenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(indenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(3-methylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(3-n-butylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(3-isopropylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(3-trimethylsilylmethylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(3-phenylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(4,5-benzoidindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(4-isopropylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(5,6-dimethylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(4,7-diisopropylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(4-phenylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)-bis(3-methyl-4-isopropylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)-bis(3-methylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)-bis(3-isopropylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)-bis(3-n-butylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)-bis(3-trimethylsilylmethylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)-bis(3-phenylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylene)-bis(indenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylene)-bis(3-isopropylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylene)-bis(3-n-butylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylene)-bis(3-trimethylsilylmethylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylene)-bis(3-trimethylsilylindenyl)zirconium dichloride, (1,2'-diphenylsilylene)(2,1'-methylene)-bis(indenyl)zirconium dichloride, (1,2'-diphenylsilylene)(2,1'-methylene)-bis(3-isopropylindenyl)zirconium dichloride, (1,2'-diphenylsilylene)(2,1'-methylene)-bis(3-n-butylindenyl)zirconium dichloride, (1,2'-diphenylsilylene)(2,1'-methylene)-bis(3-trimethylsilylmethylindenyl)zirconium dichloride, (1,2'-diphenylsilylene)(2,1'-methylene)-bis(3-trimethylsilylindenyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylene)-bis(3-methylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)(3-methylcyclopentadienyl)(3'-methylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-ethylene)(3-methylcyclopentadienyl)(3'-methylcyclopentadienyl)zirconium dichloride, (1,2'-ethylene)(2,1'-methylene)(3-methylcyclopentadienyl)(3'-methylcyclopentadienyl)zirconium dichloride, (1,2'-methylene)(2,1'-isopropylidene)(3-methylcyclopentadienyl)(3'-methylcyclopentadienyl)zirconium dichloride, (1,2'-methylene)(2,1'-isopropylidene)(3-methylcyclopentadienyl)(3'-methylcyclopentadienyl)zirconium dichloride, (1,2'-isopropylidene)(2,1'-isopropylidene)(3-methylcyclopentadienyl)(3'-methylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(3,4-dimethylcyclopentadienyl)(3',4'-dimethylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)(3,4-dimethylcyclopentadienyl)(3',4'-dimethylcyclopentadienyl)zirconium dichloride, (1,2'-ethylene)(2,1'-methylene)(3,4-dimethylcyclopentadienyl)(3',4'-dimethylcyclopentadienyl)zirconium dichloride, (1,2'-ethylene)(2,1'-isopropylidene)(3,4-dimethylcyclopentadienyl)(3',4'-dimethylcyclopentadienyl)zirconium dichloride, (1,2'-methylene)(2,1'-methylene)(3,4-dimethylcyclopentadienyl)(3',4'-dimethylcyclopentadienyl)zirconium dichloride, (1,2'-methylene)(2,1'-isopropylidene)(3,4-dimethylcyclopentadienyl)(3',4'-dimethylcyclopentadienyl)zirconium dichloride, (1,2'-isopropylidene)(2,1'-isopropylidene)(3,4-dimethylcyclopentadienyl)(3',4'-dimethylcyclopentadienyl)zirconium

EP 1 241 206 A1

dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)(3-methyl-5-ethylcyclopentadienyl)(3'-methyl-5'-ethylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)(3-methyl-5-n-butylcyclopentadienyl)(3'-methyl-5'-n-butylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-dimethylsilylene)(3-methyl-5-phenylcyclopentadienyl)(3'-methyl-5'-phenylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)(3-methyl-5-ethylcyclopentadienyl)(3'-methyl-5'-ethylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)(3-methyl-5-n-butylcyclopentadienyl)(3'-methyl-5'-n-butylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-isopropylidene)(3-methyl-5-phenylcyclopentadienyl)(3'-methyl-5'-phenylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-ethylidene)(3-methyl-5-ethylcyclopentadienyl)(3'-methyl-5'-ethylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-ethylidene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-ethylidene)(3-methyl-5-n-butylcyclopentadienyl)(3'-methyl-5'-n-butylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-ethylidene)(3-methyl-5-phenylcyclopentadienyl)(3'-methyl-5'-phenylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylidene)(3-methyl-5-ethylcyclopentadienyl)(3'-methyl-5'-ethylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylidene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylidene)(3-methyl-5-n-butylcyclopentadienyl)(3'-methyl-5'-n-butylcyclopentadienyl)zirconium dichloride, (1,2'-dimethylsilylene)(2,1'-methylidene)(3-methyl-5-phenylcyclopentadienyl)(3'-methyl-5'-phenylcyclopentadienyl)zirconium dichloride, (1,2'-ethylidene)(2,1'-methylidene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, (1,2'-ethylidene)(2,1'-isopropylidene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, (1,2'-methylidene)(2,1'-methylidene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, (1,2'-methylidene)(2,1'-isopropylidene)(3-methyl-5-isopropylcyclopentadienyl)(3'-methyl-5'-isopropylcyclopentadienyl)zirconium dichloride, and compounds obtained by replacing zirconium of the above-described compounds with titanium or hafnium, though not limited thereto. Further, similar compounds containing metal elements belonging to the other Groups or lanthanum series may also be involved in the present invention.

[0040] As the component (B-1), any compounds can be used as long as they form ionic complex by reacting with the above transition metal compound (A). Suitable compounds are represented by the following general formulae (III) or (IV):



[0041] In the formulae (III) and (IV), L¹ represents a Lewis base.

[0042] [Z]⁻ represents a non-coordinating anion [Z¹]⁻ or [Z²]⁻. [Z¹]⁻ is an anion comprising an element and a plurality of groups bonded to the element, i.e., [M⁴G¹G²...G^f]⁻ wherein M⁴ is an element belonging to Groups 5 to 15, preferably Groups 13 to 15 of the Periodic Table. G¹ to G^f are each hydrogen, halogen, C₁-C₂₀ alkyl, C₂-C₄₀ dialkylamino, C₁-C₂₀ alkoxy, C₆-C₂₀ aryl, C₆-C₂₀ aryloxy, C₇-C₄₀ alkylaryl, C₇-C₄₀ arylalkyl, C₁-C₂₀ halogen-substituted hydrocarbyl, C₁-C₂₀ acylalkoxy, organometalloid or C₂-C₂₀ hetero atom-containing hydrocarbyl, and two or more of G¹ to G^f may be bonded to each other to form a ring; f is an integer given by the formula, [(valence of central metal M⁴) + 1]. [Z²]⁻ is a conjugated base of Brønsted acid having a logarithm of reciprocal of acid dissociation constant (pKa) of -10 or lower, a conjugated base of a combination of the Brønsted acid and a Lewis acid, or a conjugated base of an acid generally defined as superstrong acid, and may be coordinated with a Lewis base.

[0043] R²¹ is hydrogen, C₁-C₂₀ alkyl, C₆-C₂₀ aryl, C₆-C₂₀ alkylaryl or C₆-C₂₀ arylalkyl.

[0044] L² is M², R²²R²³M³, R²⁴₃C or R²⁵M³ wherein R²² and R²³ are each cyclopentadienyl, substituted cyclopentadienyl, indenyl or fluorenyl; R²⁴ is C₁-C₂₀ alkyl, aryl, alkylaryl or arylalkyl, R²⁵ is a macrocyclic ligand such as tetraphenylporphyrin and phthalocyanine; M² is an element belonging to Groups 1 to 3, 11 to 13 and 17 of the Periodic Table; and M³ is an element belonging to Groups 7 to 12 of the Periodic Table.

[0045] Superscript k represents an ionic valence of [L¹-R²¹] or [L²], i.e., an integer of 1 to 3.

[0046] Subscript a is an integer of 1 or more satisfying b = k x a.

[0047] Examples of L¹ include amines such as ammonia, methylamine, aniline, dimethylamine, diethylamine, N-methylaniline, diphenylamine, N,N-dimethylaniline, trimethylamine, triethylamine, tri-n-butylamine, methyldiphenylamine, pyridine, p-bromo-N,N-dimethylaniline and p-nitro-N,N-dimethylaniline; phosphines such as triethylphos-

EP 1 241 206 A1

phine, triphenylphosphine and diphenylphosphine; thioethers such as tetrahydrothiophene; esters such as ethyl benzoate; and nitriles such as acetonitrile and benzonitrile.

[0048] Examples of R^{21} include hydrogen, methyl, ethyl, benzyl, and trityl. Examples of R^{22} and R^{23} include cyclopentadienyl, methylcyclopentadienyl, ethylcyclopentadienyl, and pentamethylcyclopentadienyl. Examples of R^{24} include phenyl, p-tolyl, and p-methoxyphenyl. Examples of R^{25} include tetraphenylporphyrin, phthalocyanine, allyl, and methallyl. Examples of M^2 include Li, Na, K, Ag, Cu, Br, I, and I_3 . Examples of M^3 include Mn, Fe, Co, Ni, and Zn.


[0049] In $[Z^1]^-$, i.e., $[M^4G^1G^2\cdots G^f]^-$, examples of M^4 include B, Al, Si, P, As, and Sb with B and Al being preferred. Examples of G^1 to G^f include dialkylamino such as dimethylamino and diethylamino; alkoxy or aryloxy such as methoxy, ethoxy, n-butoxy and phenoxy; hydrocarbyl such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, n-octyl, n-eicosyl, phenyl, p-tolyl, benzyl, 4-t-butylphenyl and 3,5-dimethylphenyl; halogen such as fluorine, chlorine, bromine and iodine; hetero atom-containing hydrocarbyl such as p-fluorophenyl, 3,5-difluorophenyl, pentachlorophenyl, 3,4,5-trifluorophenyl, pentafluorophenyl, 3,5-bis(trifluoromethyl)phenyl and bis(trimethylsilyl)methyl; and organometal-
loid such as pentamethylantimony, trimethylsilyl, trimethylgermyl, diphenylarsine, dicyclohexylantimony and diphenyl-
boron.

[0050] Examples of the non-coordinating anion, i.e., the conjugated base $[Z^2]^-$ of Brønsted acid having a pK_a of -10 or lower or the conjugated base of a combination of the Brønsted acid and a Lewis acid include trifluoromethanesulfonic acid anion $[(CF_3SO_3)^-]$, bis(trifluoromethanesulfonyl)methyl anion, bis(trifluoromethanesulfonyl)benzyl anion, bis(trifluoromethanesulfonyl)amide, perchloric acid anion $[(ClO_4)^-]$, trifluoroacetic acid anion $[(CF_3CO_2)^-]$, hexafluoroantimony anion $[(SbF_6)^-]$, fluorosulfonic acid anion $[(FSO_3)^-]$, chlorosulfonic acid anion $[(ClSO_3)^-]$, fluorosulfonic acid anion/antimony pentafluoride $[(FSO_3/SbF_5)^-]$, fluorosulfonic acid anion/arsenic pentafluoride $[(FSO_3/AsF_5)^-]$, and trifluoromethanesulfonic acid anion/antimony pentafluoride $[(CF_3SO_3/SbF_5)^-]$.

[0051] Examples of the ionic compound (B-1) capable of forming an ionic complex by reacting with the transition metal compound (A) include triethylammonium tetraphenylborate, tri-n-butylammonium tetraphenylborate, trimethylammonium tetraphenylborate, tetraethylammonium tetraphenylborate, methyl(tri-n-butyl)ammonium tetraphenylborate, benzyl(tri-n-butyl)ammonium tetraphenylborate, dimethyldiphenylammonium tetraphenylborate, triphenyl(methyl)ammonium tetraphenylborate, trimethylanilinium tetraphenylborate, methylpyridinium tetraphenylborate, benzylpyridinium tetraphenylborate, methyl(2-cyanopyridinium) tetraphenylborate, triethylammonium tetrakis(pentafluorophenyl)borate, tri-n-butylammonium tetrakis(pentafluorophenyl)borate, triphenylammonium tetrakis(pentafluorophenyl)borate, tetra-n-butylammonium tetrakis(pentafluorophenyl)borate, tetraethylammonium tetrakis(pentafluorophenyl)borate, benzyl(tri-n-butyl)ammonium tetrakis(pentafluorophenyl)borate, methyldiphenylammonium tetrakis(pentafluorophenyl)borate, triphenyl(methyl)ammonium tetrakis(pentafluorophenyl)borate, methylanilinium tetrakis(pentafluorophenyl)borate, dimethylanilinium tetrakis(pentafluorophenyl)borate, trimethylanilinium tetrakis(pentafluorophenyl)borate, methylpyridinium tetrakis(pentafluorophenyl)borate, benzylpyridinium tetrakis(pentafluorophenyl)borate, methyl(2-cyanopyridinium) tetrakis(pentafluorophenyl)borate, benzyl(2-cyanopyridinium) tetrakis(pentafluorophenyl)borate, methyl(4-cyanopyridinium) tetrakis(pentafluorophenyl)borate, triphenylphosphonium tetrakis(pentafluorophenyl)borate, dimethylanilinium tetrakis[bis(3,5-di-trifluoromethyl)phenyl]borate, ferrocenium tetraphenylborate, silver tetraphenylborate, trityl tetraphenylborate, tetraphenylporphyrin manganese tetraphenylborate, ferrocenium tetrakis(pentafluorophenyl)borate, (1,1'-dimethylferrocenium) tetrakis(pentafluorophenyl)borate, decamethylferrocenium tetrakis(pentafluorophenyl)borate, silver tetrakis(pentafluorophenyl)borate, trityl tetrakis(pentafluorophenyl)borate, lithium tetrakis(pentafluorophenyl)borate, sodium tetrakis(pentafluorophenyl)borate, tetraphenylporphyrin manganese tetrakis(pentafluorophenyl)borate, silver tetrafluoroborate, silver hexafluorophosphate, silver hexafluoroarsenate, silver perchlorate, silver trifluoroacetate, and silver trifluoromethanesulfonate.

[0052] These ionic compounds (B-1) which are capable of forming an ionic complex by reacting with the transition metal compound (A) may be used alone or in combination of two or more.


[0053] The aluminoxane (B-2) may be a linear aluminoxane represented by the following general formula (V):



wherein R^{26} is C_1 - C_{20} , preferably C_1 - C_{12} hydrocarbyl such as alkyl, alkenyl, aryl and arylalkyl or halogen; w is an average polymerization degree, i.e., an integer of usually 2 to 50, preferably 2 to 40; and R^{26} groups may be the same or different, or

a cyclic aluminoxane represented by the following general formula (VI):

EP 1 241 206 A1



wherein R^{26} and w are the same as defined above.

[0054] The above aluminoxanes may be produced by contacting an alkyl aluminum with a condensing agent such as water. The contact method is not particularly restricted, and may be conducted by any known methods. For example, there may be used:

- (1) a method of dissolving an organoaluminum compound in an organic solvent, and then contacting the solution with water;
- (2) a method of adding an organoaluminum compound at an initial stage of polymerization, and then adding water at a later stage of polymerization;
- (3) a method of reacting crystal water of a metal salt or adsorbed water of an inorganic or organic compound with an organoaluminum compound; and
- (4) a method of reacting tetraalkyldialuminoxane with an trialkylaluminum, and then with water. The aluminoxanes may be insoluble to toluene. These aluminoxanes may be used alone or in combination of two or more.

[0055] When using the compound (B-1) as the catalyst component (B), the molar ratio of the catalyst component (A) to the catalyst component (B) is preferably 10:1 to 1:100, more preferably 2:1 to 1:10. When out of the above range, the cost performance of the catalyst per unit weight of the polymer is low and therefore not practical. When using the compound (B-2) as the catalyst component (B), the molar ratio of the catalyst component (A) to the catalyst component (B) is preferably 1:1 to 1:1,000,000, more preferably 1:10 to 1:10,000. When out of the above range, the cost performance of the catalyst per unit weight of the polymer is low and therefore not practical. The compounds (B-1) and (B-2) may be used alone or in combination.

[0056] The polymerization catalyst used in the present invention may further contain, in addition to the components (A) and (B), an organoaluminum compound as the component (C).

[0057] The organoaluminum compound (C) usable in the present invention is represented by the general formula (VII):



wherein R^{27} is $\text{C}_1\text{-C}_{10}$ alkyl; J is hydrogen, $\text{C}_1\text{-C}_{20}$ alkoxy, $\text{C}_6\text{-C}_{20}$ aryl or halogen; v is an integer of 1 to 3.

[0058] Examples of the compounds represented by the general formula (VII) include trimethylaluminum, triethylaluminum, triisopropylaluminum, triisobutylaluminum, dimethylaluminum chloride, diethylaluminum chloride, methylaluminum dichloride, ethylaluminum dichloride, dimethylaluminum fluoride, diisobutylaluminum hydride, diethylaluminum hydride, and ethylaluminum sesquichloride. These organoaluminum compounds may be used alone or in combination of two or more.

[0059] In the production method of the present invention, the components (A), (B) and (C) may be preliminarily contacted with each other. The preliminary contact may be performed, for example, by contacting the component (B) with the component (A). The contacting method is not particularly restricted and may be conducted by any known method. The preliminary contact is effective to reduce the catalyst cost because the catalytic activity is improved and the use amount of the co-catalyst component (B) is reduced. By contacting the component (A) with the compound (B-2), an effect, in addition to the above effect, of increasing the molecular weight can be obtained. The preliminary contact is usually carried out at -20 to 200°C , preferably -10 to 150°C , more preferably 0 to 80°C optionally using a solvent such as inert hydrocarbons, aliphatic hydrocarbons and aromatic hydrocarbons with the aliphatic hydrocarbons being preferred.

[0060] The molar ratio of the catalyst component (A) to the catalyst component (C) is preferably 1:1 to 1:10,000, more preferably 1:5 to 1:2,000, still more preferably 1:10 to 1:1,000. The component (C) increases the polymerization activity per unit transition metal. However, an excessively large amount is useless and a large amount of the component (C) remains in the polymer.


[0061] In the present invention, at least one of the catalyst components may be carried on a suitable support. The

EP 1 241 206 A1

catalyst support usable in the present invention may be, but not limited to, inorganic oxide supports, other inorganic supports and organic supports with the inorganic oxide supports and other inorganic supports being preferred.

[0062] Examples of inorganic oxides for the catalyst support include SiO_2 , Al_2O_3 , MgO , ZrO_2 , TiO_2 , Fe_2O_3 , B_2O_3 , CaO , ZnO , BaO , ThO_2 and mixtures thereof such as silica alumina, zeolite, ferrite and glass fibers with SiO_2 and Al_2O_3 being particularly preferred. The inorganic oxide supports may contain a small amount of carbonates, nitrates, sulfates, etc.

[0063] As the other support, usable is a magnesium compound or its complex salt, such as MgCl_2 and $\text{Mg}(\text{OC}_2\text{H}_5)_2$, represented by the general formula:



wherein R^{28} is C_1 - C_{20} alkyl, C_1 - C_{20} alkoxy or C_6 - C_{20} aryl; X^1 is a halogen atom or C_1 - C_{20} alkyl; x is an integer of 0 to 2, and y is an integer of 0 to 2 with x + y being 2. R^{28} groups or X^1 groups may be the same or different, respectively.

[0064] Examples of the organic supports include polymers such as polystyrene, styrene-divinylbenzene copolymer, polyethylene, polypropylene, substituted polystyrene and polyarylate, starch, and carbon.

[0065] Of the above catalyst supports, preferred are MgCl_2 , $\text{MgCl}(\text{OC}_2\text{H}_5)$, $\text{Mg}(\text{OC}_2\text{H}_5)_2$, SiO_2 and Al_2O_3 . Although depending upon the type and the production method, the average particle size of the catalyst support is usually 1 to 300 μm , preferably 10 to 200 μm , more preferably 20 to 100 μm . An excessively small particle size of the catalyst support leads to increase in the amount of fine powder in the polymer, and an excessively large particle size leads to increase in the amount of coarse particles in the polymer to reduce the bulk density of the polymer or clog a hopper.

[0066] The specific surface area of the catalyst support is usually 1 to 1,000 m^2/g , preferably 50 to 500 m^2/g ; and the pore volume is usually 0.1 to 5 cm^3/g , preferably 0.3 to 3 cm^3/g . When the specific surface area or the pore volume is out of the above range, the catalyst activity tends to be lowered. The specific surface area and the pore volume are determined, for example, from a volume of nitrogen gas absorbed according to BET method.

[0067] Further, the inorganic oxide support is preferably used after calcined usually at 150 to 1,000°C, preferably 200 to 800°C.

[0068] When supporting at least one catalyst component on the catalyst support, at least one, preferably both, of the catalyst components (A) and (B) may be supported thereon. Although the method for supporting at least one of the catalyst components (A) and (B) is not particularly limited, the supporting may be effected, for example, by:

- (1) a method of mixing at least one of the components (A) and (B) with the catalyst support;
- (2) a method of mixing a catalyst support treated with an organoaluminum compound or a halogen-containing silicon compound with at least one of the components (A) and (B) in an inert solvent;
- (3) a method of reacting the catalyst support and the component (A) and/or the component (B) with an organoaluminum compound or a halogen-containing silicon compound;
- (4) a method of mixing a catalyst support that supports one of the component (A) and the component (B) with the other component being not supported;
- (5) a method of mixing a contact reaction product of the component (A) and the component (B) with the catalyst support; or
- (6) a method of contacting the component (A) with the component (B) in the presence of the catalyst support. The methods (4), (5) and (6) may be carried out in the presence of the organoaluminum compound (C).

[0069] The catalyst of the present invention may be prepared by irradiating the components (A), (B) and (C) with an elastic wave during the contact treatment. The elastic wave may be a sound wave, preferably an ultrasonic wave having a frequency of 1 to 1,000 kHz, preferably 10 to 500 kHz.

[0070] The catalyst thus obtained may be used for the polymerization in as-produced state or in a solid state after distilling off the solvent. Alternatively, in the present invention, the catalyst may be directly prepared in the polymerization system by supporting at least one of the component (A) and the component (B) on the catalyst support therein. For example, catalyst particles can be formed by placing at least one of the component (A) and the component (B), the catalyst support and an optional organoaluminum compound (component (C)) in a reactor, and then, pre-polymerizing an olefin such as ethylene at -20 to 200°C for about one minute to about two hours under ordinary pressure to 2 MPa.

[0071] The weight ratio of the compound (B-1) to the catalyst support is preferably 1:5 to 1:10,000, more preferably 1:10 to 1:500, and the weight ratio of the compound (B-2) to the catalyst support is preferably 1:0.5 to 1:1000, more preferably 1:1 to 1:50. When two or more kinds of the component (B) are used, the weight ratio of each component (B) to the catalyst support preferably lies within the above range. The weight ratio of the component (A) to the catalyst support is preferably 1:5 to 1:10,000, more preferably 1:10 to 1:500.

[0072] When the weight ratio of the component (B) (compound (B-1) or compound (B-2)) to the catalyst support or

EP 1 241 206 A1


the weight ratio of the component (A) to the catalyst support is out of the above range, the catalytic activity tends to be lowered. The average particle size of the polymerization catalyst thus prepared is usually 2 to 200 μm , preferably 10 to 150 μm , more preferably 20 to 100 μm . The specific surface area is usually 20 to 1,000 m^2/g , preferably 50 to 500 m^2/g . When the average particle size is less than 2 μm , the amount of fine powder in the polymer tends to be increased. When the average particle size exceeds 200 μm , the amount of coarse particles in the polymer tends to be increased. When the specific surface area is less than 20 m^2/g , the catalytic activity tends to be lowered. When the specific surface area exceeds 1,000 m^2/g , the bulk density of the polymer tends to be lowered. The amount of the transition metal in the catalyst is usually 0.05 to 10 g, preferably 0.1 to 2 g based on 100 g of the catalyst support. When out of the above range, the catalytic activity tends to be lowered.

[0073] The use of the supported catalyst enables the production of industrially useful polymers having a high bulk density and a desired particle size distribution.

(I-3b) Polymerization Catalyst 2

[0074] The polymerization catalyst 2 comprises (A) a transition metal compound (II) containing a metal element of Group 4 of the Period Table, (B) and (B) at least one component selected from the group consisting of a compound (B-1) capable of forming an ionic complex by reacting with said transition metal compound (A) or a derivative thereof, and an aluminosilicate (B-2).

[0075] The transition metal compound (II) is a singly bridged complex represented by the following general formula (II):

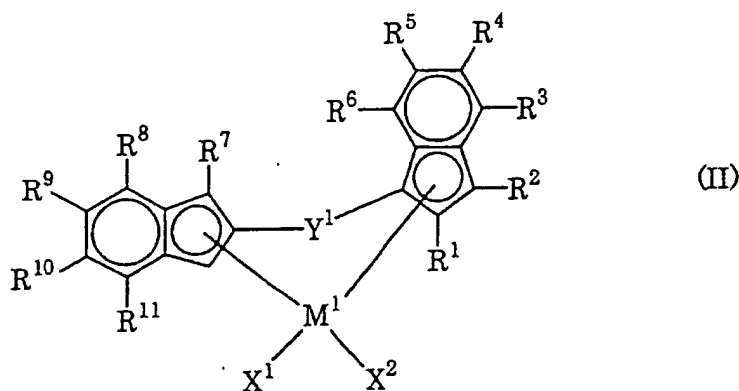

wherein R¹ to R¹¹, X¹ and X² are each independently hydrogen, halogen, C₁-C₂₀ hydrocarbyl, halogen-containing C₁-C₂₀ hydrocarbyl, silicon-containing group, oxygen-containing group, sulfur-containing group, nitrogen-containing group or phosphorus-containing group; and R³ and R⁴, or R⁸ and R⁹ may be bonded to each other to form a ring;

Y¹ is divalent group for cross-linking two ligands, and is C₁-C₂₀ hydrocarbyl, halogen-containing C₁-C₂₀ hydrocarbyl, silicon-containing group, germanium-containing group, tin-containing group, -O-, -CO-, -S-, -SO₂-, -NR-, -PR-, -P(O)R-, -BR- or -AlR- wherein R is hydrogen, halogen, C₁-C₂₀ hydrocarbyl or halogen-containing C₁-C₂₀ hydrocarbyl; and

M¹ is titanium, zirconium or hafnium.

[0076] Halogen for R¹ to R¹¹, X¹ and X² of the formula (II) may include chlorine, fluorine, bromine and iodine. C₁-C₂₀ Hydrocarbyl may include alkyl such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, tert-butyl, n-hexyl and n-decyl; aryl such as phenyl, 1-naphthyl and 2-naphthyl; and aralkyl such as benzyl. Halogen-containing C₁-C₂₀ hydrocarbyl may include a radical, such as trifluoromethyl, which is derived by replacing at least one hydrogen of C₁-C₂₀ hydrocarbyl mentioned above with a suitable halogen atom. Silicon-containing group may include trimethylsilyl and dimethyl(tert-butyl)silyl. Oxygen-containing group may include methoxy and ethoxy. Sulfur-containing group may include thiols and sulfonic acid groups, nitrogen-containing group may include dimethylamino, and phosphorus-containing group may include phenyl phosphine. R³ and R⁴, or R⁸ and R⁹ may be bonded to each other to form a ring such as fluorene. R¹ is preferably C₁-C₆ alkyl, more preferably methyl, ethyl, isopropyl or cyclohexyl. Each of R³, R⁶, R⁸ and R¹¹ is preferably hydrogen or C₁-C₆ alkyl, more preferably hydrogen, methyl or ethyl. Each of R², R⁴, R⁵, R⁷, R⁹ and R¹⁰ is preferably hydrogen. In particularly preferred combination, R¹ is alkyl and R⁷ is hydrogen. Each of X¹ and X² is preferably halogen, methyl, ethyl or propyl.

EP 1 241 206 A1

[0077] Examples of Y¹ include methylene, ethylene, ethylidene, isopropylidene, cyclohexylidene, 1,2-cyclohexylene, dimethylsilylene, tetramethyldisilylene, dimethylgermylene, methylborylidene (CH₃-B=), methylaluminumidene (CH₃-Al=), phenylphosphylidene (Ph-P=), phenylphospholidene (Ph-PO=), 1,2-phenylene, vinylene (-CH=CH-), vinylidene (CH₂=C=), methylimide, oxygen (-O-) and sulfur (-S-), with methylene, ethylene, ethylidene and isopropylidene being preferred in view of obtaining the effect of the present invention.

[0078] M¹ is titanium, zirconium or hafnium with hafnium being preferred.

[0079] Examples of the transition metal compounds of the formula (II) include 1,2-ethanediyl(1-(2-isobutylindenyl))(2-indenyl)hafnium dichloride, 1,2-ethanediyl(2-indenyl)hafnium dichloride, 1,2-ethanediyl(1-(2-butylindenyl))(2-indenyl)hafnium dichloride, 1,2-ethanediyl(1-(2-isopropylindenyl))(2-(4,7-dimethylindenyl))hafnium dichloride, 1,2-ethanediyl(1-(2-isopropylindenyl))(2-(4,7-diisopropylindenyl))hafnium dichloride, dimethylsilylene(1-(2-isobutylindenyl))(2-indenyl)hafnium dichloride, dimethylsilylene(1-(2-butylindenyl))(2-indenyl)hafnium dichloride, dimethylsilylene(1-(2-isopropylindenyl))(2-(4,7-dimethylindenyl))hafnium dichloride, methylsilylene(1-(2-isobutylindenyl))(2-(4,7-dimethylindenyl))hafnium dichloride, methylsilylene(1-(2-isopropylindenyl))(2-(4,7-diisopropylindenyl))hafnium dichloride, 1,3-propanediyl(1-(2-isopropylindenyl))(2-indenyl)hafnium dichloride, 1,3-propanediyl(1-(2-isobutylindenyl))(2-indenyl)hafnium dichloride, 1,3-propanediyl(1-(2-butylindenyl))(2-indenyl)hafnium dichloride, 1,3-propanediyl(1-(2-isopropylindenyl))(2-(4,7-dimethylindenyl))hafnium dichloride, 1,3-propanediyl(1-(2-isopropylindenyl))(2-(4,7-diisopropylindenyl))hafnium dichloride, 1,2-ethanediyl(1-(4,7-diisopropylindenyl))(2-(4,7-diisopropylindenyl))hafnium dichloride, isopropylidene(1-(4,7-diisopropylindenyl))(2-(4,7-diisopropylindenyl))hafnium dichloride, 1,2-ethanediyl(1-(4,7-dimethylindenyl))(2-(4,7-diisopropylindenyl))hafnium dichloride, 1,2-ethanediyl(9-fluorenyl)(2-(4,7-dimethylindenyl))hafnium dichloride, isopropylidene(1-(4,7-dimethylindenyl))(2-(4,7-diisopropylindenyl))hafnium dichloride, 1,2-ethanediyl(2-indenyl)(1-(2-isopropylindenyl))hafnium dichloride, dimethylsilylene(2-indenyl)(1-(2-isopropylindenyl))hafnium dichloride, and compounds obtained by replacing hafnium of the above compounds with titanium or zirconium, although not limited thereto.

[0080] The transition metal compound represented by the formula (II) is produced by, e.g., the method disclosed in Japanese Patent Application Laid-Open No. 11-130807 of the same assignee. Two or more of the transition metal compounds (II) may be used as the catalyst component (A).

[0081] The catalyst component (B) of the polymerization catalyst 2 is the same as in the polymerization catalyst 1. Like the polymerization catalyst 1, the polymerization catalyst 2 may be supported on a carrier, subjected to pre-polymerization, or combinedly used, if desired, with the organoaluminum compound (C) mentioned above.

(I-3c) Polymerization

[0082] The propylene polymer (A) and the propylene homopolymer (A-1) may be produced by any polymerization method of, but not particularly restricted, slurry polymerization, vapor-phase polymerization, bulk polymerization, solution polymerization, and suspension polymerization with slurry polymerization and vapor-phase polymerization being preferred. Examples of C₄-C₂₀ α-olefins include 1-butene, 1-pentene, 4-methyl-1-pentene, 1-hexene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene, and 1-eicosene. These α-olefins may be used alone or in combination of two or more.

[0083] As to the polymerization conditions, the polymerization temperature is usually -100 to 250°C, preferably -50 to 200°C, more preferably 0 to 130°C. The molar ratio of the starting monomer or monomers to the component (A) is preferably 1 to 10⁸, more preferably 100 to 10⁵. The polymerization time is usually 5 min to 10 h, and the polymerization reaction pressure is preferably from ordinary pressure to 20 MPa, more preferably from ordinary pressure to 10 MPa.

[0084] The molecular weight of the polymer may be controlled by appropriately selecting kinds and amounts of the catalyst components and polymerization temperature, or by polymerizing in the presence of a chain transfer agent such as hydrogen; silane compounds such as phenylsilane and phenyldimethylsilane; and organoaluminum compounds such as trimethyl aluminum with hydrogen being preferred. The addition amount of the chain transfer agent is 10 mol or more, preferably 50 mol or more per one mol of the transition metal in the catalyst.

[0085] The polymerization may be carried out using a solvent, for example, aromatic hydrocarbons such as benzene, toluene, xylene and ethyl benzene; alicyclic hydrocarbons such as cyclopentane, cyclohexane and methylcyclohexane; aliphatic hydrocarbons such as pentane, hexane, heptane and octane; and halogenated hydrocarbons such as chloroform and dichloromethane. These solvent may be used alone or in combination of two or more. Also, the monomer such as α-olefins may be used as the solvent. In some polymerization methods, polymerization is performed in the absence of a solvent.

[0086] Prior to the main polymerization, a pre-polymerization may be conducted using the polymerization catalyst. The pre-polymerization can be carried out, for example, by contacting a small amount of olefins with the solid catalyst component. The contact method is not particularly restricted, and may be any known method. Olefins usable in the pre-polymerization are not particularly restricted, and the same olefins as exemplified above, e.g., ethylene, C₃-C₂₀

EP 1 241 206 A1

α -olefins or mixtures thereof may be used. The olefin used in the pre-polymerization is preferred to be the same as that to be used in the subsequent main polymerization.

[0087] The temperature of the pre-polymerization is usually from -20 to 200°C, preferably from -10 to 130°C, more preferably from 0 to 80°C. The pre-polymerization may be carried out using a solvent such as inert hydrocarbons, aliphatic hydrocarbons, aromatic hydrocarbons and monomers with aliphatic hydrocarbons being preferred. Alternatively, the pre-polymerization may be conducted in the absence of a solvent.

[0088] The pre-polymerization conditions are preferably controlled such that the resultant prepolymerization product has an intrinsic viscosity $[\eta]$ of 0.2 dl/g or higher, preferably 0.5 dl/g or higher when measured at 135°C in tetralin, and the yield thereof is 1 to 10,000 g, preferably 10 to 1,000 g per 1 mmol of the transition metal in the catalyst.

(I-4) Production of Polypropylene Film

[0089] The propylene polymer (A) and propylene homopolymer (A-1) are formed into films having a thickness of usually 10 to 10,000 μm by any suitable molding method of compression molding, extrusion, blow molding, casting, or the like. The film-forming conditions are easily determined by one of those skilled in the art. Films produced by a cast molding are preferred. The surface of film may be treated, if necessary, to increase the surface energy and polarize the surface. The treating method includes, for example, corona discharge treatment, chromic acid treatment, flame treatment, hot-air treatment, ozone irradiation, and ultraviolet irradiation. The surface of film may be roughened, for example, by sandblasting treatment, solvent treatment or the like.

[0090] The film may contain, if desired, a nucleating agent, an anti-oxidant, a neutralizer, a slipping agent, an anti-blocking agent, an anti-fogging agent, an anti-static agent, etc.

[0091] The nucleating agents and additives used optionally may be dry-blended with the propylene polymer in a Henschel mixer or the like, or may be melt-kneaded with the propylene polymer in a single- or twin-screw extruder, a Banbury mixer or the like. The high-melting polymers may be added to a reactor at once or gradually during the production of the propylene polymer.

[0092] The nucleating agent is not particularly limited as far as it can accelerate the nucleation process. Examples of substances having such effect are those capable of facilitating the orientation of molecular chains through the adsorption of the molecular chains. The nucleating agents may be high-melting polymers, carboxylic acids or metal salts thereof, aromatic sulfonic acids or metal salts thereof, organophosphoric acids or metal salts thereof, dibenzylidenesorbitol or derivatives thereof, partial metal salts of rosin acids, inorganic fine particles, imides, amides, quinacridones, quinones, or mixtures thereof.

[0093] Examples of the high-melting polymers include polyolefins such as polyethylene and polypropylene; polyvinylcycloalkanes such as polyvinylcyclohexane and polyvinylcyclopentane; syndiotactic polystyrene; poly(3-methylpentene-1); poly(3-methylbutene-1); and polyalkenylsilanes.

[0094] Examples of the metal salts include aluminum benzoate, aluminum p-tert-butylbenzoate, sodium adipate, sodium thiophenecarboxylate, and sodium pyrrolecarboxylate.

[0095] Examples of the dibenzylidenesorbitol and its derivatives include dibenzylidenesorbitol, 1,3:2,4-bis(o-3,4-dimethylbenzylidene) sorbitol, 1,3:2,4-bis(o-2,4-dimethylbenzylidene)sorbitol, 1,3:2,4-bis(o-4-ethylbenzylidene sorbitol, 1,3:2,4-bis(o-4-chlorobenzylidene sorbitol, and 1,3:2,4-dibenzylidenesorbitol. The dibenzylidenesorbitol or its derivatives are commercially available as Gelol MD and Gelol MD-LM30 (product names) from New Japan Chemical Co., Ltd.

[0096] Examples of the partial metal salts of rosin acids include Pinecrystal KM1600, Pinecrystal KM1500 and Pinecrystal KM1300 (product names) available from Arakawa Chemical Industries Ltd.


[0097] Examples of the inorganic particles include talc, clay, mica, asbestos, glass fibers, glass flakes, glass beads, calcium silicate, montmorillonite, bentonite, graphite, aluminum powder, alumina, silica, diatomaceous earth, titanium oxide, magnesium oxide, pumice stone powder, pumice balloons, aluminum hydroxide, magnesium hydroxide, basic magnesium carbonate, dolomite, calcium sulfate, potassium titanate, barium sulfate, calcium sulfite, and molybdenum sulfide.

[0098] Examples of the amides include adipic acid dianilide and suberic acid dianilide.

[0099] These nucleating agents may be used alone or in combination of two or more.

[0100] In the present invention, preferably used as the nucleating agents are inorganic fine particles of talc and a metal salt of an organophosphoric acid represented by the following general formula:

EP 1 241 206 A1

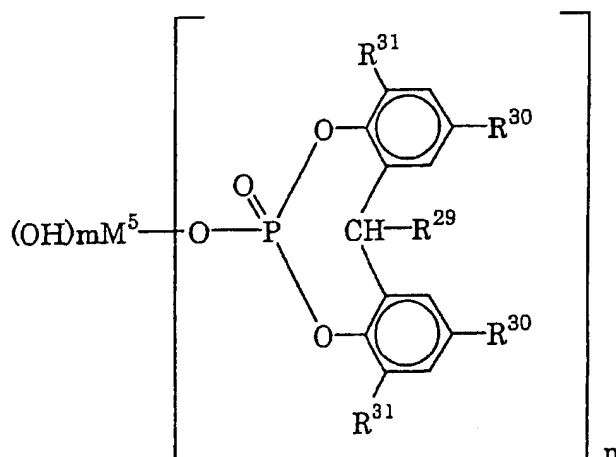

wherein R^{29} is hydrogen or C_1 - C_4 alkyl; R^{30} and R^{31} are each individually hydrogen, C_1 - C_{12} alkyl, cycloalkyl, aryl or aralkyl; M^5 is alkali metal, alkaline earth metal, aluminum or zinc; m is 0 and n is 1 when M^5 is alkali metal; n is 1 and m is 1, or n is 2 and m is 0 when M^5 is alkaline earth metal or zinc; and m is 1 and n is 2 when M^5 is aluminum, because these nucleating agents generate little odor, rendering the films suitable for food applications. The organophosphoric acid metal salt may be available from Asahi Denka Kogyo K.K. under trade names of Adekastab NA-11 and Adekastab NA-21.

[0101] The addition amount of the nucleating agent is usually 10 ppm or more, preferably 10 to 10,000 ppm, more preferably 10 to 5,000 ppm, still more preferably 10 to 2,500 ppm based on the propylene polymer (A) or the propylene homopolymer (A-1). When the amount is less than 10 ppm, the processability of the film cannot be improved. The use exceeding 10,000 ppm creates no additional effect.

[0102] Films including, as the nucleating agent, the inorganic particles such as talc improve the workability of fabrication such as bag-forming and printing because excellent in slip properties, and are suitable for producing general-purpose packaging films by a high-speed production machine such as various types of automatic filling and packaging laminators. Films including, as the nucleating agent, the dibenzylidenesorbitol or its derivatives are suitable for producing packaging films for toys, stationery, etc. because excellent in transparency and display effect. Films including, as the nucleating agent, the amides are suitable for producing any types of general-purpose packaging films by high-speed bag making machines because capable of preventing defects such as winding wrinkle owing to their excellent rigidity.

[0103] The anti-oxidants may be phosphorus anti-oxidants, phenol anti-oxidants and sulfur anti-oxidants.

[0104] Examples of the phosphorus antioxidants include tris(nonylphenyl) phosphite, tris(2,4-di-tert-butylphenyl) phosphite, distearyl-pentaerythritol diphosphite, bis(2,4-di-tert-butylphenyl)pentaerythritol phosphite, bis(2,6-di-tert-butyl-4-methylphenyl)pentaerythritol phosphite, 2,2-methylenebis(4,6-di-tert-butylphenyl)octyl phosphite, tetrakis(2,4-di-tert-butylphenyl)-4,4-biphenylene diphosphonite, Adekastab 1178(Asahi Denka Kogyo K.K.), Sumiriser TNP (Sumitomo Chemical Company Ltd.), JP-135 (Johoku Kagaku Co., Ltd.), Adekastab 2112 (Asahi Denka Kogyo K.K.), JPP-2000 (Johoku Kagaku Co., Ltd.), Weston 618 (GE Co., Ltd.), Adekastab PEP-24G (Asahi Denka Kogyo K.K.), Adekastab PEP-36 (Asahi Denka Kogyo K.K.), Adekastab HP-10 (Asahi Denka Kogyo K.K.), Sandstab P-EPQ (Clariant Corp.), and Phosphite 168 (Ciba Specialty Chemicals Co., Ltd.).

[0105] Examples of the phenol anti-oxidants include 2,6-di-tert-butyl-4-methyl phenol, n-octadecyl-3-(3',5'-di-tert-butyl-4'-hydroxyphenyl) propionate, tetrakis[methylene-3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate] methane, tris(3,5-di-tert-butyl-4-hydroxybenzyl) isocyanurate, 4,4'-butylidenebis-(3-methyl-6-tert-butyl phenol), triethylene glycol-bis[3-(3-tert-butyl-4-hydroxy-5-methylphenyl) propionate], 3,9-bis[2-[3-(3-tert-butyl-4-hydroxy-5-methylphenyl) propionyloxy]-1,1-dimethylethyl]-2,4,8,10-tetraoxaspiro[5.5] undecane, Sumiriser BHT (Sumitomo Chemical Company Ltd.), Yoshinox BHT (Yoshitomi Seiyaku Co., Ltd.), Antage BHT (Kawaguchi Kagaku Co., Ltd.), Irganox 1076 (Ciba Specialty Chemicals Corp.), Irganox 1010 (Ciba Specialty Chemicals Corp.), Adekastab AO-60 (Asahi Denka Kogyo K.K.), Sumiriser BP-101 (Sumitomo Chemical Company Ltd.), Tominox TT (Yoshitomi Seiyaku Co., Ltd.), TTHP (Toray Industries), Irganox 3114 (Ciba Specialty Chemicals Corp.), Adekastab AO-20 (Asahi Denka Kogyo K.K.), Adekastab AO-40 (Asahi Denka Kogyo K.K.), Sumiriser BBM-S (Sumitomo Chemical Company Ltd.), Yoshinox BB (Yoshitomi Seiyaku Co., Ltd.), Antage W-300 (Kawaguchi Kagaku Co., Ltd.), Irganox 245 (Ciba Specialty Chemicals Corp.), Adekastab AO-70 (Asahi Denka Kogyo K.K.), Tominox 917 (Yoshitomi Seiyaku Co., Ltd.), Adekastab AO-80 (Asahi Denka

EP 1 241 206 A1

Kogyo K.K.), and Sumiriser GA-80 (Sumitomo Chemical Company Ltd.).

[0106] Examples of the sulfur anti-oxidants include dilauryl-3,3'-thiodipropionate, dimyristyl-3,3'-thiodipropionate, distearyl-3,3'-thiodipropionate, pentaerythritol tetrakis(3-laurylthiopropionate), SUMIRISER TPL (Sumitomo Chemical Company Ltd.), Yoshinox DLTP (Yoshitomi Seiyaku Co., Ltd.), Antiox L (NOF Corporation), Sumiriser TPM (Sumitomo Chemical Company Ltd.), Yoshinox DMTP (Yoshitomi Seiyaku Co., Ltd.), Antiox M (NOF Corporation), Sumiriser TPS (Sumitomo Chemical Company Ltd.), Yoshinox DSTP (Yoshitomi Seiyaku Co., Ltd.), Antiox S (NOF Corporation), Ltd., Adekastab AO-412S (Asahi Denka Kogyo K.K.), Seenox 412S (Sipro Kasei Co., Ltd.), and Sumiriser TDP (Sumitomo Chemical Company Ltd.).

[0107] Preferred phenol anti-oxidants are:

Irganox 1010 (pentaerythrityl-tetrakis[3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate]) available from Ciba Specialty Chemicals Corp.;

Irganox 1076 (octadecyl-3-(3,5-di-tert-butyl-4-hydroxyphenyl) propionate) available from Ciba Specialty Chemicals Corp.;

Irganox 1330 (1,3,5-trimethyl-2,4,6-tris(3,5-di-tert-butyl-4-hydroxybenzyl) benzene) available from Ciba Specialty Chemicals Corp.; and

Irganox 3114 (tris(3,5-di-tert-butyl-4-hydroxybenzyl) isocyanurate) available from Ciba Specialty Chemicals Corp.

[0108] Preferred phosphorus anti-oxidants are:

Irgaphos 168 (tris(2,4-di-tert-butylphenyl) phosphite) available from Ciba Specialty Chemicals Corp.; and P-EPQ (tetrakis(2,4-di-tert-butylphenyl)-4,4'-biphenylene diphosphite) available from Clariant Corp.

[0109] The amount of the anti-oxidant, when used, is about 0.001 to about 1 part by mass based on 100 parts by mass of the propylene polymer (A) or the propylene homopolymer (A-1). The addition of the anti-oxidant preferably prevents the yellowing, etc. of the polymer.

[0110] As the neutralizers, particularly preferred are calcium stearate, zinc stearate, magnesium stearate, hydrotalcite such as DHT-4A (composition: $Mg_{4.5}Al_2(OH)_{13}CO_3 \cdot 3.5H_2O$) available from Kyowa Kagaku Kogyo Co., Ltd., and lithium-aluminum composite hydroxide such as Mizukalac ($[Li_2Al_4(OH)_{12}]CO_3 \cdot mH_2O$ wherein m is ca. 3) available from Mizusawa Kagaku Kogyo Co., Ltd.

[0111] As the anti-blocking agents, particularly preferred are a synthetic silica anti-blocking agent "Sailicia" available from Fuji Silysia Co., Ltd., and a synthetic silica anti-blocking agent "Mizukasil" available from Mizusawa Kagaku Kogyo Co., Ltd.

[0112] Particularly preferred slipping agents are erucamide, oleamide, stearamide, behenamide, ethylene bisstearamide, ethylene bisoleamide, stearyl erucamide, and oleyl palmitamide.

[0113] The addition amount of each additive is about 0.001 to about 1 part by mass based on 100 parts by mass of the propylene polymer (A) or the propylene homopolymer (A-1). Examples of the additive formulation are shown below.

Anti-oxidant

1000 ppm of Irganox 1010 available from Ciba Specialty Chemicals Corp.

1000 ppm of Irgaphos 168 available from Ciba Specialty Chemicals Corp.

Neutralizer

1000 ppm of calcium stearate

Anti-blocking agent

2300 ppm of a silica anti-blocking agent available from Fuji Silysia Co., Ltd.

Slipping agent

500 ppm of erucamide

(II) Multilayered Polyolefin Resin Laminate

[0114] The multilayered polyolefin resin laminate of the present invention is a laminate in which at least one outermost layer (hereinafter referred to as "heat-seal layer") is produced from either the propylene polymer (A) or the propylene homopolymer (A-1). The other layers (hereinafter referred to as "intermediate layer" or "laminate layer") may be produced from various polymers other than the propylene polymer (A) and the propylene homopolymer (A-1). Of such various polymers, preferred is a propylene polymer. As the propylene polymer, any propylene polymer having crystallinity (hereinafter referred to as "crystalline propylene polymer") can be used without particular limitation. Examples of the crystalline propylene polymer include propylene homopolymers, propylene-ethylene random copolymers, propylene-ethylene-1-butene random copolymers, and propylene-ethylene block copolymers. The molecular weight of any

EP 1 241 206 A1

of the crystalline propylene polymers is determined according to the desired processability. For example, the melt index (at 230°C, 2160 gf) is preferably about 2 to 20 g/10min for T-die cast film-forming, and preferably about 1 to 10 g/10min for sheet forming. According to the intended use of films and sheets, a suitable polymer is selected from those having various melt indices. For example, a propylene homopolymer of high melting point and high crystallinity is suitable for the application in which heat resistance and heat seal strength are important. Such a polymer is disclosed in Japanese Patent Application Laid-Open No. 8-85711. The proposed polymer satisfies:

- (1) an isotactic pentad fraction P, an index of the stereoregularity, is from 85.0 to 92.0 mol%;
- (2) a n-heptane insoluble H is from 93.0 to 97.0% by mass;
- (3) P and H satisfy the following formula:

$$0.750P + 27.125 < H;$$

and further satisfies

- (4) a melt index MI (230°C, 2160 gf: the same applies hereinafter) is from 1 to 20 g/10min; and
- (5) the following formula:

$$\tau \leq 0.65 - 0.025MI$$

wherein τ is a relaxation time at frequency $\omega_0 = 100$ rad/sec that is measured by a frequency dispersion measurement at 175°C.

[0115] Preferred polymer satisfies:

- (1) the isotactic pentad fraction P is from 85.0 to 92.0 mol%;
- (2) the n-heptane insoluble H is from 86.0 to 97.0% by mass;
- (3) P and H satisfy the following formula:

$$0.750P + 26.000 < H;$$

and

- (4) the melt index MI is from 1 to 25 g/10min; and
- (5) the following formula:

$$\tau \leq 0.63 - 0.025MI$$

wherein τ is as defined above.

[0116] The definitions and measuring methods of P, H, MI, ω_0 , and τ , and the production method of the propylene polymer are as described in Japanese Patent Application Laid-Open No. 8-85711.

[0117] Further, in order to improve low-temperature heat sealability of the film or sheet, preferably usable are a propylene-ethylene random copolymer, a propylene-ethylene-1-butene random copolymer (hereinafter referred to as "propylene random copolymers") excellent in low-temperature heat sealability, which are disclosed in, e.g., Japanese Patent Application Laid-Open Nos. 9-208629, 9-272718 and 10-130336. The propylene random polymer proposed in Japanese Patent Application Laid-Open No. 9-208629 is a propylene-ethylene random copolymer and satisfies the following requirements (1) to (5):

- (1) an ethylene unit content χ is from 3 to 10% by weight;
- (2) a melt index MI is from 4 to 12 g/10min;
- (3) a fraction E (wt %) extractable with boiling diethyl ether and % satisfy the following formula (i) or (ii):

$$E \leq 0.25 \chi + 1.1 \quad (\chi = 3 \text{ to } 6\% \text{ by weight}) \quad (i)$$

$$E \leq 2.6 \quad (\chi = 6 \text{ to } 10\% \text{ by weight}) \quad (ii);$$

EP 1 241 206 A1

(4) a melting point T_m (°C) measured by differential scanning calorimeter and χ satisfy the following formula (iii) or (iv):

$$T_m \leq 140 \quad (\chi = 3 \text{ to } 5\% \text{ by weight}) \quad (\text{iii})$$

$$T_m \leq 165 - 5\chi \quad (\chi = 5 \text{ to } 10\% \text{ by weight}) \quad (\text{iv});$$

and

(5) an isotactic triad fraction [mm] of PPP chain is 98.0 mol% or more as measured by ^{13}C -NMR.

[0118] The propylene random polymer proposed in Japanese Patent Application Laid-Open No. 9-272718 is a propylene-ethylene random copolymer and satisfies the following requirements (1) to (5):

- (1) an ethylene unit content χ is from 0.2 to 4% by weight;
- (2) a melt index MI is from 4 to 12 g/10min;
- (3) a fraction E (wt %) extractable with boiling diethyl ether and χ satisfy the following formula (v):

$$E \leq 0.25\chi + 1.1 \quad (\text{v})$$

(4) a melting point T_m (°C) measured by differential scanning calorimeter and χ satisfy the following formula (vi):

$$T_m \leq 165 - 5\chi \quad (\text{vi});$$

and

(5) an isotactic triad fraction [mm] of PPP chain is 98.0 mol% or more as measured by ^{13}C -NMR.

[0119] The propylene random polymer proposed in Japanese Patent Application Laid-Open No. 11-60639 is a propylene-ethylene-1-butene random copolymer and satisfies the following requirements (1) to (6):

(1) an ethylene unit content α (mol%) and a 1-butene unit content β (mol%) satisfy the following formula (vii):

$$4 \leq \alpha + \beta \leq 15 \quad (\text{vii});$$

- (2) a melt index MI is from 1 to 12 g/10min;
- (3) a fraction E extractable with boiling diethyl ether and $(\alpha + \beta)$ satisfy the following equation (viii) when $\alpha + \beta \leq 12$, and satisfy the following equation (ix) when $\alpha + \beta > 12$:

$$E \leq 0.2(\alpha + \beta) + 0.6 \quad (\text{viii})$$

$$E \leq 3.0 \quad (\text{ix});$$

(4) a melting point T_m (°C) measured by differential scanning calorimeter and $(\alpha + \beta)$ satisfy the following formula (x):

$$T_m \leq 164 - 3.6(\alpha + \beta) \quad (\text{x});$$

- (5) a stereoregularity index P is 98 mol% or higher as measured by ^{13}C -NMR; and
- (6) a ratio M_w/M_n is 6 or less, wherein M_w is a weight-average molecular weight and M_n is a number-average molecular weight as measured by gel permeation chromatography (GPC).

EP 1 241 206 A1

[0120] The definitions and measuring methods of the parameters as well as the production methods of the polymers are as described in the corresponding patent documents. Films and sheet produced from a propylene polymer (crystalline propylene polymer and propylene random copolymer) with no crystallinity tend to be deteriorated in rigidity and heat resistance. In particularly preferred embodiment, the multilayered polyolefin resin laminate of the present invention has at least one, preferably 1 to 3, more preferably 1 to 2 intermediates or laminate layers produced from the crystalline propylene polymer other than the propylene polymers (A) and (A-1).

[0121] The intermediate or laminate layer may be produced from a dry blend of the crystalline propylene polymer and the propylene random copolymer prepared using a Henschel mixer or the like, or may be produced from a melt-kneaded mixture prepared using a single- or twin-screw extruder, a Banbury mixer or the like. The mixing ratio of the propylene random copolymer is usually from 1 to 99% by weight, preferably from 10 to 90% by weight, most preferably from 20 to 80% by weight. When the mixing ratio of the propylene random copolymer is less than 1% by weight, the intermediate layer or laminate layer tends to be deteriorated in transparency and impact resistance.

[0122] The multilayered polyolefin resin laminate of the present invention may be produced by any suitable production method without particular limitation, for example, by a melt co-extrusion. Particularly, a T-die casting method is preferable because a high-speed forming using a large forming machine is applicable. The high-speed film forming may be conducted under conditions of a take-off speed of about 50 m/min or higher. The thickness of the multilayered laminate is not particularly restricted, and is usually about 10 to 5,000 μm .

[0123] The present invention will be described in more detail by reference to the following examples. However, it should be noted that the following examples are only illustrative and not intended to limit the invention thereto.

[0124] The resins properties of polymers were evaluated by the following methods.

(1) $[\eta]$

The intrinsic viscosity of the polymer was measured at 135°C in tetralin using an automatic viscometer "VMR-053 Model" available from Rigosha Co., Ltd.

(2) Pentad fraction, triad fraction and abnormal insertion

The peaks of ^{13}C -NMR spectra obtained under the following conditions were assigned according to the method proposed by A. Zambelli, et al., *Macromolecules*, 8, 687 (1975).

Apparatus: ^{13}C -NMR spectrometer "JNM-EX400 Model" manufactured by Nippon Denshi Co., Ltd.

Method: complete proton decoupling method

Concentration: 220 mg/mL

Solvent: 1,2,4-trichlorobenzene/heavy benzene mixed solvent (90/10 by volume)

Temperature: 130°C

Pulse width: 45°

Pulse interval: 4 s

Integration: 10,000 times

(3) Molecular weight distribution (Mw/Mn)

Mw/Mn was calculated from the weight-average molecular weight Mw and the number-average molecular weight Mn which were measured by GPC under the following conditions and calibrated based on polyethylene standard. GPC Apparatus:

Column: Toso GMHHR-H(S)HT

Detector: RI Detector "WATERS 150C" for liquid chromatogram

Measuring conditions:

Solvent: 1,2,4-trichlorobenzene

Measuring temperature: 145°C

Flow rate: 1.0 mL/min

Sample concentration: 2.2 mg/mL

Injection amount: 160 μL

Calibration curve: Universal Calibration

Analytic program: HT-GPC (Ver. 10)

(4) DSC measurement

A differential scanning calorimeter ("DSC-7" available from Perkin Elmer Co., Ltd.) was used. After melting 10 mg sample by heating at 230°C for 3 min in nitrogen atmosphere, the sample was cooled to 0°C at a rate of 10

EP 1 241 206 A1

°C/min. The cooled sample was kept at 0°C for 3 min, and then heated at a temperature rise rate of 10 °C/min to obtain a melting endotherm curve. The melting endotherm was expressed as ΔH . The peak top of the maximum peak of the melting endotherm curve was taken as the melting point T_m (°C).

(5) Temperature programmed chromatography

(a) Measuring method

A sample solution was introduced into a TREF column at 135°C, and then gradually cooled to 0°C at 5°C/min. The temperature was kept at 0°C for 30 min to adsorb the sample on the packed adsorbent. The temperature was then raised to 135°C at 40°C/h to obtain an elution curve. The amount of a fraction eluted in a temperature range of $T_p \pm 5^\circ\text{C}$, wherein T_p is a peak temperature appeared in the elution curve, was determined. In addition, the half-width, T_h (°C), of the peak in the elution curve was measured.

(b) Apparatus

TREF column: silica gel column (4.6 ϕ x 150 mm) available from GL Science Co., Ltd.;
 Flow cell: KBr cell with 1-mm optical path available from GL Science Co., Ltd.;
 Feed Pump: SSC-3100 available from Senshu Kagaku Co., Ltd.;
 Valve oven: MODEL 554 (high-temperature type) available from GL Science Co., Ltd.;
 TREF oven: available from GL Science Co., Ltd.;
 Two-line temperature controller: REX-C100 available from Rigaku Kogyo Co., Ltd.;
 Detector: IR Detector "MIRAN 1A CVF" for liquid chromatography available from Foxboro Co., Ltd.;
 10-Way valve: electric valve available from Balco Co., Ltd; and
 Loop: 500 μL loop available from Balco Co., Ltd.

(c) Measuring conditions

Solvent: o-dichlorobenzene;
 Sample concentration: 7.5 g/L;
 Injection amount: 500 μL ;
 Pumping flow: 2.0 mL/min;
 Detection wave number: 3.41 μm ;
 Adsorbent: Chromosorb P (30-60 mesh); and
 Column temperature distribution: within $\pm 0.2^\circ\text{C}$.

(6) Fraction extractable with boiling diethyl ether

The measurement was performed using a Soxhlet extractor under the following conditions.

Sample amount: 1 to 2 g;
 Sample form: powder (pulverized into powder, if pellets were used);
 Extractant: diethyl ether;
 Extraction time: 10 h;
 Extraction frequency: 180 times or more; and
 Content: Calculated from the following equation:

$$[\text{extracted amount (g)}/\text{charged amount (g)}] \times 100.$$

Evaluation of Films and Laminates

[0125] After producing a laminate and a single-layered film, the laminate and the film were subjected to aging at 40°C for 24 h and then to conditioning at $23 \pm 2^\circ\text{C}$ and a humidity of $50 \pm 10\%$. The measurements were conducted under the same temperature and humidity conditions.

(1) Tensile modulus and Breaking strength

Determined according to tensile test of JIS K-7127 under the following conditions:

Cross-head speed: 500 mm/min
 Load cell: 15 kg
 Measuring direction: machine direction (MD direction)

EP 1 241 206 A1

(2) Impact resistance

Evaluated by the impact strength measured using a film impact tester with 1/2 inch impact head available from Toyo Seiki Seisaku-Sho, Co., Ltd..

(3) Transparency (internal haze)

The haze of a sample with its surface coated with oil was measured according to JIS K-7105. The measured value was taken as the internal haze.

(4) Heat-seal temperature

The heat-seal temperature was measured according to JIS Z-1707. The heat-sealing conditions were shown below. The temperature of the heat seal bar was calibrated by a surface thermometer. The heat-sealed films were left overnight at room temperature, and then, the peel strength was measured by T-peel test at room temperature at a peeling speed of 200 mm/min. The heat-seal temperature was expressed by a temperature at which the peel strength was 2.94 N/15 mm calculated from a seal temperature-peel strength curve.

Sealing time: 2 sec;

Sealing area: 15 x 10 mm;

Sealing pressure: 0.52 MPa; and

Sealing temperature; measured several times for interpolation.

(5) Slipping properties

A sled having a film thereon was placed on a glass plate having a film thereon. Then, the glass plate was inclined gradually to measure the inclination angle at which the sled started to slide was measured. The slipping properties of the film were determined based on a tangent of the inclination angle. The inclination angle was measured under the following conditions using a friction angle measuring apparatus available from Toyo Seiki Seisaku-Sho Co., Ltd.

Measuring surface: surface opposite to metal-rolled surface (heat-sealed surface) / metal-rolled surface;

Inclination speed: 2.7°/s;

Mass of sled: 1 kg;

Sled sectional area: 65 cm²; and

Contact pressure: 1.5 MPa (Gauge).

(6) Anti-blocking properties

Measuring method 1

Two films were press-contacted under the following conditions with the metal-rolled surface of one of the films opposing to the non-metal rolled surface of the other. The films were fixedly mounted on a 10 cm x 10 cm jig, and the peel strength of 10 cm x 10 cm area was measured under the following conditions. Smaller the peel strength, more excellent the anti-blocking properties.

Contact conditions:

Temperature: 60°C

Period: 7 days

Load: 15 g/cm²

Contact area: 10 cm x 10 cm;

Peeling conditions:

Peeling speed: 20 mm/min

Load cell: 2 kg

Measuring method 2

Two laminates were press-contacted under the following conditions with the non-metal rolled surface (heat seal surface) of one of the laminates opposing to the non-metal rolled surface of the other. The films were fixedly mounted on a 10 cm x 10 cm jig, and the peel strength of 10 cm x 10 cm area was measured under the following conditions. Smaller the peel strength, more excellent the anti-blocking properties.

Contact conditions:

EP 1 241 206 A1

Temperature: 50°C
 Period: 7 days
 Load: 15 g/cm²
 Contact area: 10 cm x 10 cm;

Peeling conditions:

Peeling speed: 20 mm/min
 Load cell: 2 kg

Measuring method 3

The same as Measuring method 2 except for press-contacting the non-metal rolled surface (heat seal surface) of one of the laminates with the metal rolled surface (laminate surface) of the other.

(7) Interlaminar strength

The interlaminar strength was rated as "poor" when the heat-seal layer (surface A) was separated from the other layer by pulling with tweezers, and rated as "good" when not separated from the other layer.

SYNTHESIS EXAMPLE 1

[0126] Preparation of 1,2-ethanediyl(2-indenyl)(1-(2-isopropylindenyl)) hafnium dichloride

[0127] Into a 100-mL three-necked flask, were charged 20 mL of THF and 1.69 g (9.9 mmol) of 2-isopropylindenyl-lithium, and the solution was cooled to -78°C. After adding 1.74 mL (10 mmol) of hexamethylphosphoramide, a solution of 20 mL of THF and 2 g (8.96 mmol) of 1-bromo-2-(2-indenyl)ethane was added dropwise from a dropping funnel. After stirring at room temperature for 8 h, 5 mL of water and then 100 mL of ether were added. The organic phase was washed three times with 50 mL of an aqueous copper sulfate solution using a separatory funnel. The solvent was removed by distillation from the separated organic phase, and the residue was purified on a column using a hexane eluent to obtain 2 g of 1-(2-indenyl)-2-(1-(2-isopropylindenyl))ethane.

[0128] Then, into a 200-mL Schlenk tube, were charged 20 mL of diethyl ether and 2 g of 1-(2-indenyl)-2-(1-(2-isopropylindenyl))ethane under nitrogen flow, and the solution was cooled to -78°C. After adding 10 mL of a 1.61 M hexane solution of n-butyl lithium (n-butyl lithium: 16.1 mmol), the mixture was stirred at room temperature for 8 h. Then, the solvent was removed by distillation and the residue was washed with hexane to obtain 2.14 g of a lithium salt of 1-(2-indenyl)-2-(1-(2-isopropylindenyl))ethane.

[0129] Then, 10 mL of toluene was added to 1.15 g (3.18 mmol) of the lithium salt and cooled to -78°C. A slurry, cooled to -78°C in advance, of 1.02 g (3.18 mmol) of hafnium tetrachloride in 10 mL of toluene was added to the lithium salt of 1-(2-indenyl)-2-(1-(2-isopropylindenyl))ethane through a cannula. The mixture was stirred at room temperature for 8 h and filtrated to separate a supernatant. The filtrate was concentrated and then recrystallized from a methylene chloride/hexane mixed solvent to obtain 0.45 g (0.83 mmol) of 1,2-ethanediyl(2-indenyl)(1-(2-isopropylindenyl))hafnium dichloride.

¹H-NMR:

(δ , ppm): 7.8-7.0 (m, 8H), 6.50 (s, 1H), 5.92 (d, 1H), 3.65 (s, 4H), 3.30 (m, 1H), 1.50 (d, 3H), 1.25 (d, 3H)

EXAMPLE 1

[0130] After thoroughly vacuum-drying a 1-L stainless steel pressure autoclave equipped with a stirrer at 80°C, the pressure was returned to atmospheric pressure by nitrogen gas and the autoclave was cooled to room temperature. Into the autoclave, were charged 400 mL of a deoxygenated dry heptane and 0.5 mL of a 2.0 M heptane solution of triisobutylaluminum (1.0 mmol) under dry nitrogen flow, and the mixture was stirred for a while at 350 rpm. Separately, into a 50-mL Schlenk tube having fully purged with nitrogen, were charged 10 mL of toluene and 0.5 mL of a 2 M heptane solution of triisobutylaluminum (1.0 mmol), 1.0 mL of a 2.0 M toluene solution of methylaluminoxane (MAO) (2.0 mmol) and 0.2 mL of a 10 μ mol/mL heptane slurry of 1,2-ethanediyl(2-indenyl)(1-(2-isopropylindenyl))hafnium dichloride (2.0 μ mol), and the mixture was stirred at room temperature for 3 min. The catalyst slurry thus prepared was rapidly charged into the autoclave, and then the stirring of the mixture was initiated at 1,200 rpm. Then, propylene was introduced into the autoclave to slowly increase the total pressure to 0.8 MPa (Gauge), and at the same time, the temperature was slowly raised to 50°C. The polymerization was continued for 60 min. After completion of the polymerization, the remaining propylene was released, and the reaction mixture was poured into 2 L of methanol to precipitate polypropylene, which was then filtrated and dried to obtain polypropylene.

[0131] The resin properties of the polypropylene were examined by the above evaluation methods. After compound-

EP 1 241 206 A1

ing the following additives, the propylene homopolymer was extruded into pellets through a single-screw extruder "TLC 35-20 Model" available from Tsukada Juki Seisakusho Co., Ltd. Additive formulation

Anti-oxidant:

Irganox 1010 available from Ciba Specialty Chemicals Corp.: 1,000 ppm
Irgaphos 168 available from Ciba Specialty Chemicals Corp.: 1,000 ppm

Neutralizer:

Calcium stearate: 1,000 ppm

Anti-blocking agent:

silica-based anti-blocking agent: 2,300 ppm

Slipping agent:

Erucamide: 2,500 ppm
The pellets were formed into film of a thickness of 50 μ m by using a film-forming machine "TLC35-20 Model" (20 mm ϕ) available from Tsukada Juki Seisakusho Co., Ltd under the following conditions:

T-die outlet temperature: 190°C

Take-off speed: 6.0 m/min

Chill roll temperature: 30°C

Chill roll: mirror surface

[0132] The film was measured by the above evaluation methods for films and laminates. The results are shown in Table 1.

COMPARATIVE EXAMPLE 1

[0133] The procedures of Example 1 were repeated except for using polypropylene F744NP (available from Idemitsu Petrochemical Co., Ltd.) which was produced by using a non-metallocene catalyst (Ti/Mg catalyst). The results are shown in Table 1.

EXAMPLE 2

[0134] A multilayered laminate forming machine equipped with a feed block type T-die was used for forming resin into laminates. The feed block type T-die was provided with a T-die available from Koshin Engineering Co., Ltd., a feed block available from Tawaraya Tekkosho Co., Ltd., an extruder "EX40 Model" available from Placo. Co., Ltd. (No. 1), an extruder "VS30-26 Model" available from Tanabe Plastics Machinery Co., Ltd. (No. 2), and an extruder "RT-3-30 Model" available from Rikua Co., Ltd. (No. 3). By extruding the polypropylene prepared in Example 1 from the extruder No. 1, and E-105-GM (polypropylene available for Idemitsu Petrochemical Co., Ltd.) from the extruders Nos. 2 and 3, a laminate having an overall thickness of 30 μ m with a thickness ratio of polypropylene layer/E-105GM layer = 1/2. The resin extruded from the extruder No. 2 was divided into two layers so as to produce a laminate having a 3-resin, 4-layered structure of No. 1/No. 2/No. 3/No. 2 in the order from the opposite side of the first chill-rolled surface. The resin temperature at the feed block and the T-die outlet was 230°C; the chill roll temperature was 30°C; and the take-off speed was 25 m/min. The laminate was examined by the above evaluation methods for laminates. The results are shown in Table 2.

COMPARATIVE EXAMPLE 2

[0135]

(1) Preparation of magnesium compound

A 6-L glass reactor equipped with a stirrer was fully purged with nitrogen gas, and then charged with about 2,430 g of ethanol, 16 g of iodine and 160 g of metallic magnesium. The mixture was heated under stirring and

EP 1 241 206 A1

the reaction was continued under reflux until the generation of hydrogen gas was no longer noticed, thereby obtaining a solid product. The reaction liquid containing the solid product was dried under reduced pressure to obtain a magnesium compound.

(2) Preparation of solid catalyst component (A)

Into a 5-L glass reactor having been fully purged with nitrogen gas, were charged 160 g of the magnesium compound (not ground) prepared above, 80 mL of purified heptane, 24 mL of silicon tetrachloride, and 23 mL of diethyl phthalate. Then, 770 mL of titanium tetrachloride was added to the mixture with stirring while keeping the mixture at 80°C, and the reaction was allowed to proceed at 110°C for 2 h. The resulting solid component was separated and washed with purified heptane at 90°C. The reaction was further allowed to proceed by adding 1,220 mL of titanium tetrachloride at 110°C for 2 h. The product was fully washed with purified heptane to obtain a solid catalyst component (A).

(3) Gas-phase polymerization of propylene

The polymerization was conducted at 70 °C and 28 kg/cm²G by feeding into a 200-L polymerization reactor the solid catalyst component prepared in Step 2 at a rate of 6.0 g/h, triisobutylaluminum (TIBA) at a rate of 0.2 mol/h, 1-allyl-3,4-dimethoxybenzene (ADMB) at a rate of 0.012 mol/h, cyclohexylmethyldimethoxysilane (CHM-DMS) at a rate of 0.18 mol/h, and propylene at a rate of 37 kg/h.

(4) Blending and kneading

The polypropylene thus obtained was blended with 2,5-dimethyl-2,5-di-(tert-butylperoxy)hexane, and then with the same additives as in Example 1. The resulting blend was extruded from a 40-mmφ extruder into pellets. A monolayered film made from the pellets was evaluated in the same manner as in Example 1. The results are shown in Table 1. Further, a laminate was produced and evaluated in the same manner as in Example 2. The results are shown in Table 2.

Table 1

	Example	Comparative	Examples
	1	1	2
Resin Properties			
[η] (dl/g)	1.7	1.7	1.9
[m] (mol%)	78.0	-	72.1
[r] (mol%)	0.4	-	6.1
[r]/(1-[m])	0.018	-	0.22
2,1-Insertion (mol%)	0	-	0
1,3-Insertion (mol%)	0.3	-	0
Mw/Mn	2.2	4.3	2.6
Tm (°C)	130	134	160
ΔH (J/g)	92	81	79
0.45 × Tm + 22	80.5	82.3	94
Th (°C)	3.4	17	7.7
Boiling ether extract (wt %)	0.2	2.0	12
Properties of Single-Layered Film			
Tensile Modulus TM (MPa)	832	655	514
Impact Resistance (1/2 inch) (J/m ²)	17000	16000	20000
Internal Haze (%)	1.3	1.8	16
Heat-seal temperature HST (°C)	125	130	160
12.5 × HST-900	662.5	725	1100
Anti-blocking properties (N/m ²) by measuring method 1	19	63	-

EP 1 241 206 A1

Table 2

	Example 2	Comparative Example 2
Properties of laminate		
Internal haze (%)	5.3	8.4
Tensile modulus TM (MPa)	1140	1070
Slipping properties	0.30	0.42
Anti-blocking properties (N/m ²)	16	45
by measuring method 2		
Anti-blocking properties (N/m ²)	9	23
by measuring method 3		
Heat seal temperature HST (°C)	127	148
Interlaminar strength	good	poor

Industrial Applicability

[0136] The polypropylene film of the present invention is well-balanced between the tensile modulus and the heat seal temperature, less tacky, and excellent in the processability, the transparency and the impact resistance, and is therefore suitably used in, e.g., food packaging and medical fields. The multilayered polyolefin resin laminate of the present invention is also well-balanced between the tensile modulus and the heat seal temperature, less tacky and excellent in the slipping and anti-blocking properties necessary for high-speed bag forming, and is therefore suitably used in, e.g., food packaging and medical fields.

Claims

1. A polypropylene film satisfying the following formula:

$$TM \geq 12.5 \times HST - 900$$

where TM is a tensile modulus (MPa) and HST is a heat seal temperature (°C).

2. The polypropylene film according to Claim 1, made of a propylene polymer (A) having:

- (1) a melting point Tm of from 120 to 135 °C as measured by differential scanning calorimeter (DSC);
- (2) a melting endotherm ΔH (J/g) as measured by the DSC, satisfying the following formula:

$$\Delta H \geq 0.45 \times Tm + 22;$$

- (3) a peak top half-width Th of 5 °C or lower when measured on an elution curve by temperature rising fractionation; and
- (4) an intrinsic viscosity [η] of from 1 to 3 dl/g as measured at 135 °C in tetralin.

3. The polypropylene film according to Claim 2, wherein the propylene polymer (A) is a propylene homopolymer (A-1) having:

- (1) a meso pentad fraction [mmmm] of from 70 to 80 mol%; and
- (2) a racemic pentad fraction [rrrr] satisfying the following formula:


$$[rrrr]/(1 - [mmmm]) \leq 0.1.$$

4. The polypropylene film according to Claim 2 or 3, wherein the propylene polymer (A) or the propylene homopolymer (A-1) is produced by polymerizing propylene, or polymerizing propylene with ethylene and/or C₄-C₂₀ α-olefin, in

EP 1 241 206 A1

the presence of a polymerization catalyst comprising:

(A) a transition metal compound represented by the following general formula (I):

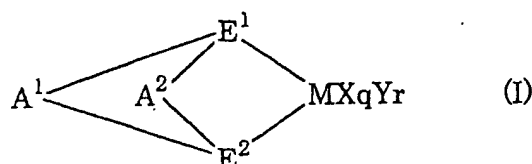

wherein M is a metal element of Groups 3 to 10 or lanthanum series of the Period Table;

E¹ and E² are the same or different and each independently is a ligand selected from the group consisting of substituted cyclopentadienyl, indenyl, substituted indenyl, heterocyclopentadienyl, substituted heterocyclopentadienyl, amido, phosphide, hydrocarbyl and silicon-containing group; and E¹ and E² are cross-linked via A¹ and A²;

X is a σ -bonding ligand; and a plurality of X, if any, may be same or different and each X may be cross-linked with another X, E¹, E² or Y;

Y is a Lewis base; and a plurality of Y, if any, may be same or different and each Y may be cross-linked with another Y, E¹, E² or X;

A¹ and A² may be the same or different divalent group for cross-linking two ligands E¹ and E² and each independently is C₁-C₂₀ hydrocarbyl, C₁-C₂₀ halogen-containing hydrocarbyl, silicon-containing group, germanium-containing group, tin-containing group, -O-, -CO-, -S-, -SO₂-, -Se-, -NR-, -PR-, -P(O)R-, -BR- or -AlR- wherein R is hydrogen, halogen, C₁-C₂₀ hydrocarbyl or C₁-C₂₀ halogen-containing hydrocarbyl;


q is an integer of 1 to 5 given by the formula, [(valence of M) - 2]; and

r is an integer of 0 to 3, and

(B) at least one component selected from the group consisting of a compound (B-1) capable of forming an ionic complex by reacting with the transition metal compound (A) or a derivative thereof, and an aluminoxane (B-2).

5. The polypropylene film according to Claim 2 or 3, wherein the propylene polymer (A) or the propylene homopolymer (A-1) is produced by polymerizing propylene, or polymerizing propylene with ethylene and/or C₄-C₂₀ α -olefin, in the presence of a polymerization catalyst comprising:

(A) a transition metal compound represented by the following general formula (II):

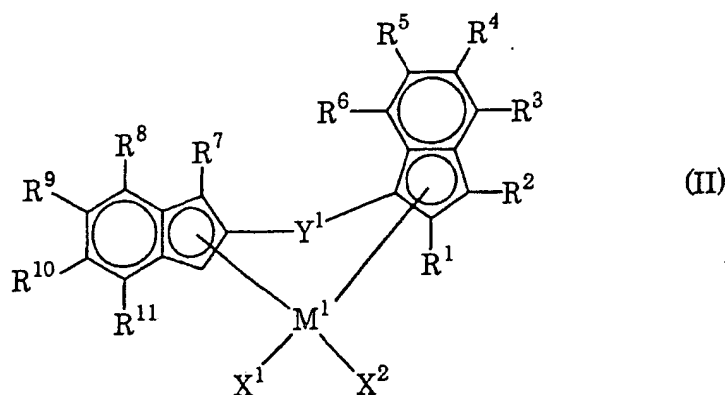

wherein R¹ to R¹¹, X¹ and X² are each independently hydrogen, halogen, C₁-C₂₀ hydrocarbyl, halogen-containing C₁-C₂₀ hydrocarbyl, silicon-containing group, oxygen-containing group, sulfur-containing group, nitrogen-containing group or phosphorus-containing group; and R³ and R⁴, or R⁸ and R⁹ may be bonded to each other to form a ring;

Y¹ is divalent group for cross-linking two ligands, and is C₁-C₂₀ hydrocarbyl, halogen-containing C₁-C₂₀

EP 1 241 206 A1

hydrocarbyl, silicon-containing group, germanium-containing group, tin-containing group, -O-, -CO-, -S-, -SO₂-, -NR-, -PR-, -P(O)R-, -BR- or -AlR- wherein R is hydrogen, halogen, C₁-C₂₀ hydrocarbyl or halogen-containing C₁-C₂₀ hydrocarbyl; and

M¹ is titanium, zirconium or hafnium; and

(B) at least one component selected from the group consisting of a compound (B-1) capable of forming an ionic complex by reacting with the transition metal compound (A) or a derivative thereof, and an aluminoxane (B-2).

6. The polypropylene film according to any one of Claims 1 to 5, having an internal haze of 5% or less.
7. The polypropylene film according to any one of Claims 1 to 6, wherein the polypropylene film is a cast film.
8. A multilayered polyolefin resin laminate, comprising at least one outmost layer made of the polypropylene film as defined in any one of Claims 1 to 7.
9. The multilayered polyolefin resin laminate according to Claim 8, comprising at least one layer made of a crystalline propylene polymer other than the propylene polymer (A) and the propylene homopolymer (A-1).
10. The multilayered polyolefin resin laminate according to Claim 8 or 9, wherein the laminate is produced by coextrusion.
11. The multilayered polyolefin resin laminate according to Claim 8 or 9, wherein the laminate is produced by casting.

EP 1 241 206 A1

INTERNATIONAL SEARCH REPORT		International application No. PCT/JP00/07408															
A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ C08J 5/18 C08F10/06 C08F4/645 B32B27/32 B29C41/24 // C08L23:10 B29K23:00 According to International Patent Classification (IPC) or to both national classification and IPC																	
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ C08J 5/18 C08F10/06 C08F4/645 B32B27/32 B29C41/24 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Jitsuyo Shinan Keisai Koho 1996-2000 Kokai Jitsuyo Shinan Koho 1971-2000 Toroku Jitsuyo Shinan Koho 1994-2000 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CAS ONLINE																	
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X A</td> <td>WO, 99/09098, A1 (Idemitsu Petrochemical Co., Ltd.), 25 February, 1999 (25.02.99), Claims; page 11, line 11 to page 12, line 1; page 37, line 13 to page 38, line 6; Tables 6-14 & EP, 1006149, A1, page 7, "0027"- "0028"; page 19, "0162"- "0166" & KR, 99067960, A</td> <td>1,2,4-11 3</td> </tr> <tr> <td>X A</td> <td>JP, 11-106433, A (Idemitsu Petrochemical Co., Ltd.), 20 April, 1999 (20.04.99), Claims; page 5, "0029"- "0030"; Tables 1-1-4 (Family: none)</td> <td>1,6-11 2-5</td> </tr> <tr> <td>X A</td> <td>JP, 11-060833, A (Idemitsu Petrochemical Co., Ltd.), 05 March, 1999 (05.03.99), Claims; page 3, "0008"; page 5, "0018"; Table 1; Examples 1,2 (Family: none)</td> <td>1,2,4-11 3</td> </tr> <tr> <td>X A</td> <td>JP, 11-1584, A (Idemitsu Petrochemical Co., Ltd.), 06 January, 1999 (06.01.99), Claims; page 3, "0009"- "0010"; page 5, "0024"; page 10, Table 1 (Family: none)</td> <td>1,2,4-11 3</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X A	WO, 99/09098, A1 (Idemitsu Petrochemical Co., Ltd.), 25 February, 1999 (25.02.99), Claims; page 11, line 11 to page 12, line 1; page 37, line 13 to page 38, line 6; Tables 6-14 & EP, 1006149, A1, page 7, "0027"- "0028"; page 19, "0162"- "0166" & KR, 99067960, A	1,2,4-11 3	X A	JP, 11-106433, A (Idemitsu Petrochemical Co., Ltd.), 20 April, 1999 (20.04.99), Claims; page 5, "0029"- "0030"; Tables 1-1-4 (Family: none)	1,6-11 2-5	X A	JP, 11-060833, A (Idemitsu Petrochemical Co., Ltd.), 05 March, 1999 (05.03.99), Claims; page 3, "0008"; page 5, "0018"; Table 1; Examples 1,2 (Family: none)	1,2,4-11 3	X A	JP, 11-1584, A (Idemitsu Petrochemical Co., Ltd.), 06 January, 1999 (06.01.99), Claims; page 3, "0009"- "0010"; page 5, "0024"; page 10, Table 1 (Family: none)	1,2,4-11 3
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.															
X A	WO, 99/09098, A1 (Idemitsu Petrochemical Co., Ltd.), 25 February, 1999 (25.02.99), Claims; page 11, line 11 to page 12, line 1; page 37, line 13 to page 38, line 6; Tables 6-14 & EP, 1006149, A1, page 7, "0027"- "0028"; page 19, "0162"- "0166" & KR, 99067960, A	1,2,4-11 3															
X A	JP, 11-106433, A (Idemitsu Petrochemical Co., Ltd.), 20 April, 1999 (20.04.99), Claims; page 5, "0029"- "0030"; Tables 1-1-4 (Family: none)	1,6-11 2-5															
X A	JP, 11-060833, A (Idemitsu Petrochemical Co., Ltd.), 05 March, 1999 (05.03.99), Claims; page 3, "0008"; page 5, "0018"; Table 1; Examples 1,2 (Family: none)	1,2,4-11 3															
X A	JP, 11-1584, A (Idemitsu Petrochemical Co., Ltd.), 06 January, 1999 (06.01.99), Claims; page 3, "0009"- "0010"; page 5, "0024"; page 10, Table 1 (Family: none)	1,2,4-11 3															
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.																	
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family																	
Date of the actual completion of the international search 07 December, 2000 (07.12.00)		Date of mailing of the international search report 19 December, 2000 (19.12.00)															
Name and mailing address of the ISA/ Japanese Patent Office Facsimile No.		Authorized officer Telephone No.															

Form PCT/ISA/210 (second sheet) (July 1992)

EP 1 241 206 A1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/07408

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	JP, 9-208629, A (Idemitsu Petrochemical Co., Ltd.), 12 August, 1997 (12.08.97), Claims; page 5, "0023"- "0024"; page 9, Table 2 (Family: none)	1, 6-11 2-5
X A	JP, 7-329260, A (Gunze Limited), 19 December, 1995 (19.12.95), Claims; page 4, "0018"; page 5, Table 1 (Family: none)	1, 6-11 2-5
X A	JP, 60-55046, A (Idemitsu Petrochemical Co., Ltd.), 29 March, 1985 (29.03.85), Claims; page 3, Table 1; Examples 1-6 (Family: none)	1, 6, 7 2-5, 8-11
A	JP, 9-151213, A (CHISSO CORPORATION), 10 June, 1997 (10.06.97), Claims (Family: none)	1-11
A	JP, 4-97843, A (Toyobo Co., Ltd.), 30 March, 1992 (30.03.92), Claims (Family: none)	1-11

Form PCT/ISA/210 (continuation of second sheet) (July 1992)